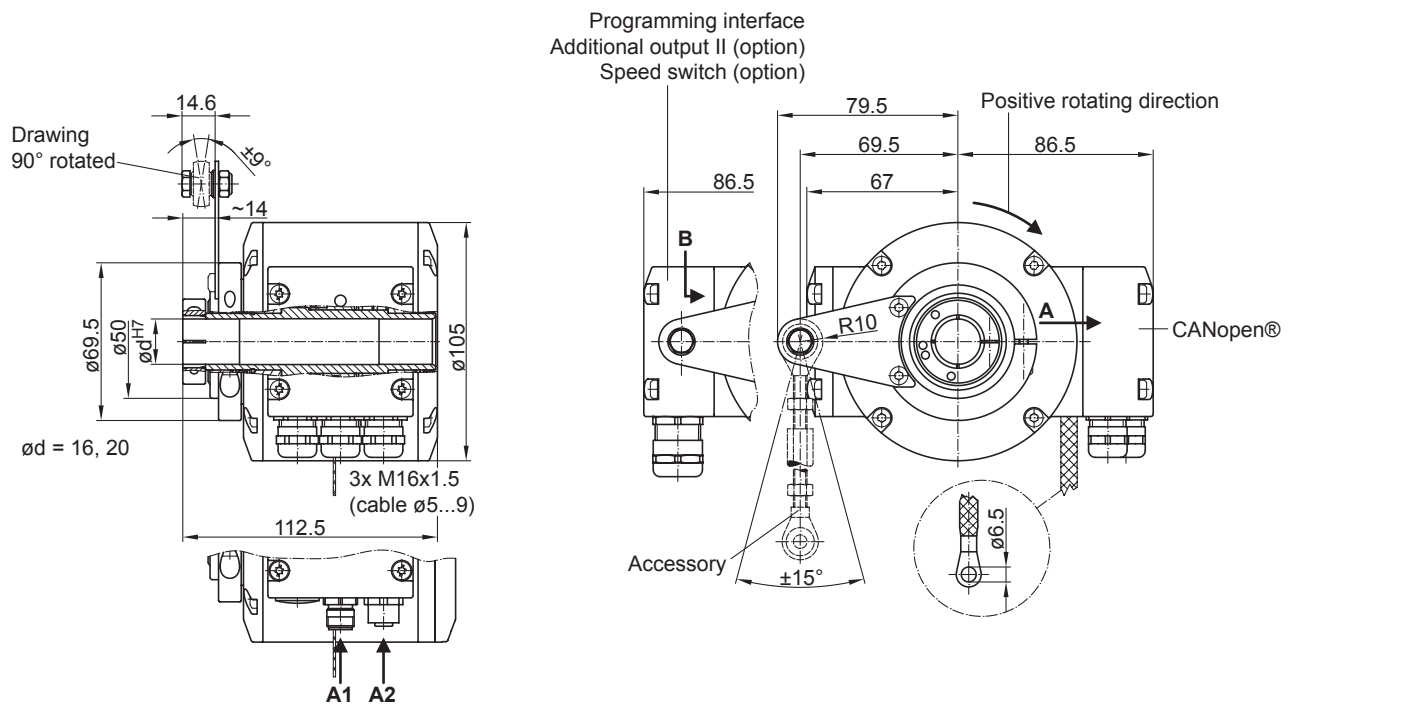

Programming interface
Additional output II (option)
Speed switch (option)
14.6
Drawing
90° rotated
±9°
~14
79.5
69.5
67
86.5
86.5
Positive rotating direction
B
A
R10
CANopen®
ø69.5
ø50
ød H7
ø105
ød = 16, 20
3x M16x1.5
(cable ø5...9)
112.5
Accessory
±15°
ø6.5
A1
A2