KombiSIGN 71 / LED Revolving Signal Beacon 644

LED Rotating light el. 24VAC/DC YE



Part No.:	**644.330.75**
Series:	**KombiSIGN 71**

MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Yellow
Protection category	IP65
Service life optical	100,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	83 g
Product weight	66 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3


OPTICAL DATA	
Light source	LED
Light colour	Yellow
Optical signal image	Revolving
Rotation frequency (rpm)	120 U/min

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Revolving Signal Beacon 644

LED Rotating light el. 24VAC/DC YE

DRAWING

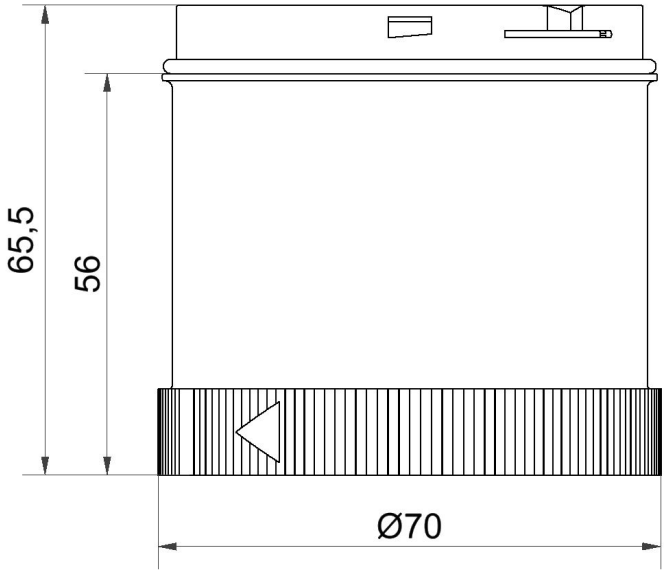

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.