Mini Horns Sirens Buzzer / Buzzer 128

# Buzzer WM Contin/pulse 230VAC GY



**Part No.: 128.000.68**

CE RoHS

| MECHANICAL DATA | |
|---|---|
| Length | 91 mm |
| Width | 83 mm |
| Height | 84 mm |
| Diameter | 83 mm |
| Materials | PC<br>PC/ABS |
| Housing colour | Grey |
| Protection category | IP65 |
| Connection | Screw terminals |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Cable entry | Membrane grommet |
| Cable entry minimum | d = 1 mm |
| Cable entry maximum | d = 9 mm |
| Tension relief | Pull-out protection |
| Type of fixing | Wall mounting |
| Acoustic service life | 5,000 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 142 g |
| Product weight | 108 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 25 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| ACUSTICAL DATA | |
|---|---|
| Volume/dB(max) at 1m distance | 92,0 dB (A) |
| Acoustic signal image | Continuous tone<br>Pulse tone |
| Audio frequency | 2300 Hz |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini Horns Sirens Buzzer / Buzzer 128

## Buzzer WM Contin/pulse 230VAC GY

**DRAWING**

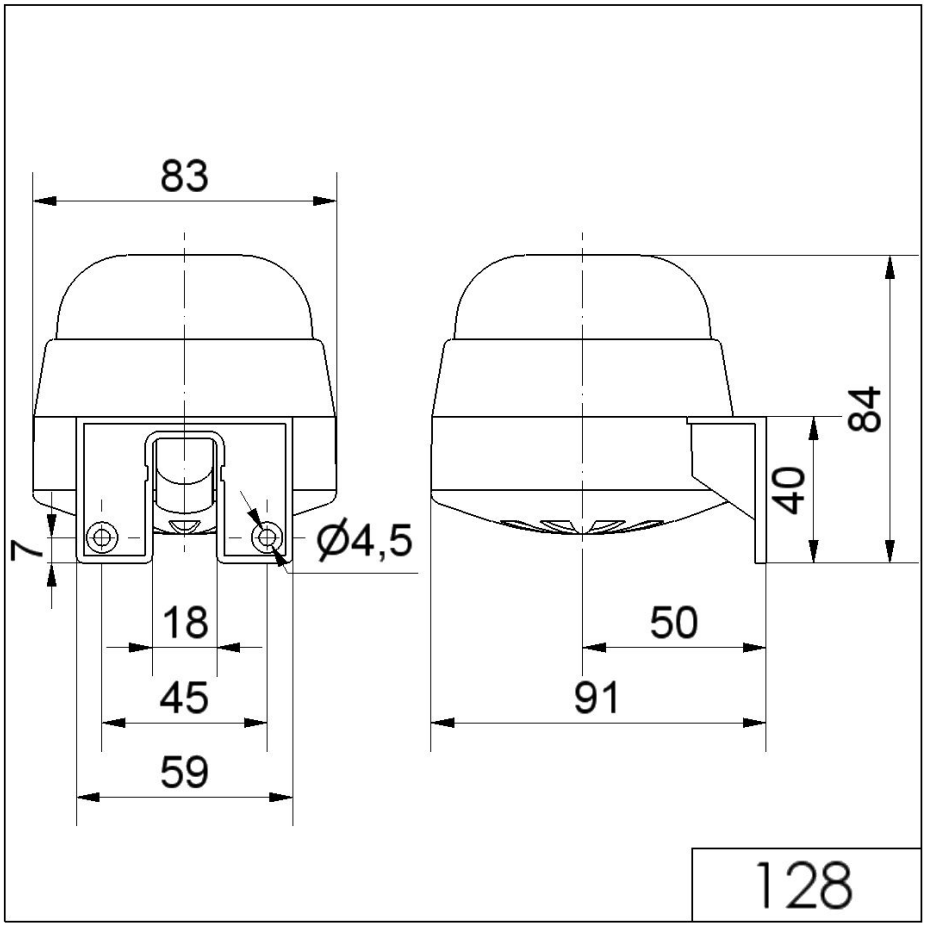


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.