Mini Horns Sirens Buzzer / Signal Horn 582

# Signal horn WM Contin. tone 12VDC GY



**Part No.: 582.052.54**

CE RoHS

| MECHANICAL DATA | |
|---|---|
| Height | 172 mm |
| Diameter | 70 mm |
| Materials | PC/ABS |
| Housing colour | Grey |
| Protection category | IP33 |
| Connection | Screw terminals |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Cable entry | Through hole |
| Cable entry maximum | d = 9 mm |
| Type of fixing | Wall mounting |
| Acoustic service life | 300 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 210 g |
| Product weight | 176 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 12V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 12 VDC |
| Rated operational current | 150 mA |
| Rated inrush current | <5A |
| Protection class | Protection class 3 |
| Pollution degree | 2 |
| Request to external PSU | SELV/PELV |


| ACUSTICAL DATA | |
|---|---|
| Volume/dB(max) at 1m distance | 92,0 dB (A) |
| Acoustic signal image | Continuous tone |
| Audio frequency | 500 Hz |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini Horns Sirens Buzzer / Signal Horn 582

# Signal horn WM Contin. tone 12VDC GY

**DRAWING**

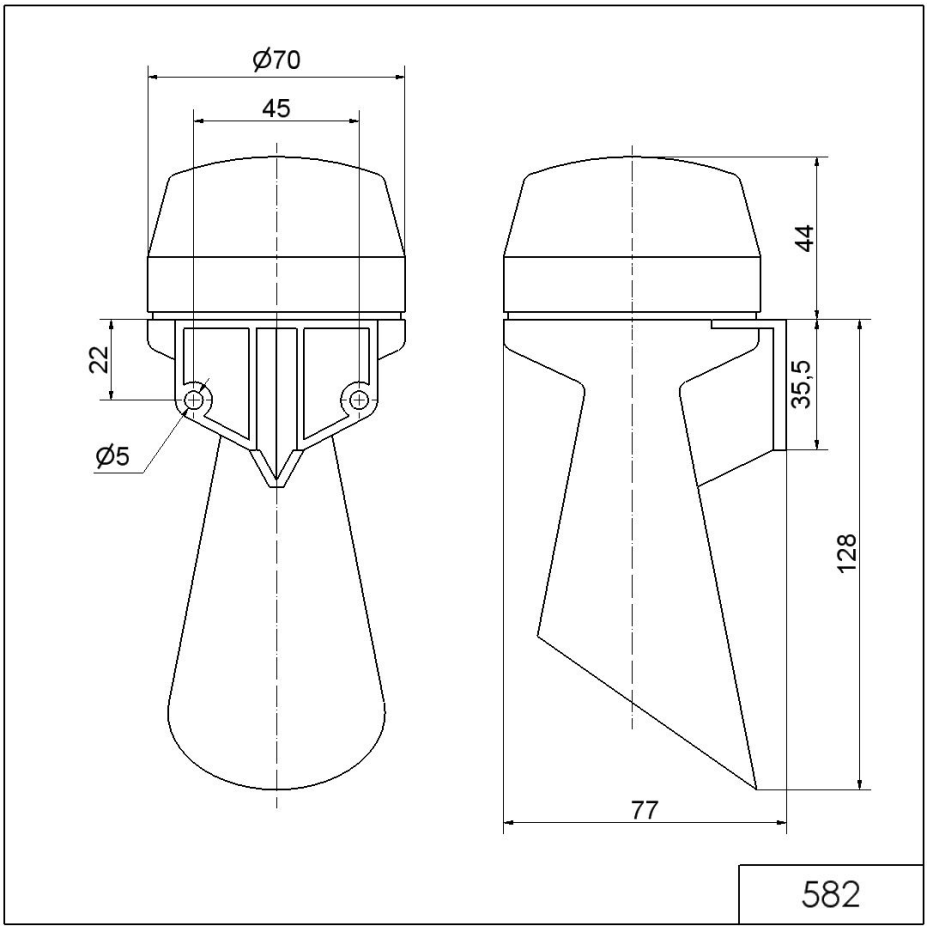


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.