
距离传感器

OM70-11185168

尺寸图

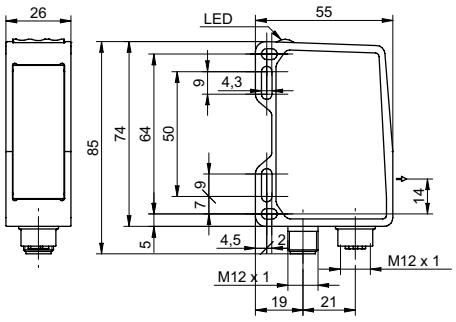

* 发射器轴

基本参数

类型	distance measuring
版本	OM70 multi-spot
测量距离 Sd	100 ... 150 mm
测量范围 (宽度)	48 ... 72 mm
调节	Webserver, Ethernet TCP/IP
通电指示灯	LED 绿色
输出指示灯	LED 黄色 / LED 红色
ethernet link indication	LED blue
分辨率	2 ... 4 µm 1) 2) 4) 5)
线性误差	± 30 ... ± 90 µm 1) 2) 4)
光源	脉冲式红色激光二极管
波长	656 nm
激光等级	1
光束类型	multi-spot
温漂	± 0,04 % Sde/K 1) 2) 4)


电气参数

响应 / 释放时间	3,5 ms 2) 3)
测量频率	570 Hz 2) 3)
工作电压范围 +Vs	15 ... 28 VDC
电流消耗 (最大) (无负载)	150 mA
输出电流	< 100 mA
开关输出	推挽
短路保护	是
反向极性保护	是, Vs到 GND
接口	Ethernet TCP/IP
protocol	Modbus TCP, OPC UA
webserver	是

照片



连接图



激光警告

CLASS 1 LASER PRODUCT

IEC 60825-1/2014
Complies with 21 CFR 1040.10 and 1040.11
except for deviations pursuant to laser
notice No. 50, dated June 24, 2007

距离传感器

OM70-11185168

机械参数	
宽度 / 直径	26 mm
高度 / 长度	74 mm
深度	55 mm
类型	直角 · 正视图
外壳材料	铝
前面 (光学)	玻璃
连接器类型	connector M12 8 pin & M12 4 pin
weight	135 g

环境条件	
环境光免疫	< 35 kLux
操作温度	-10 ... +50 °C
防护等级	IP 67
储藏温度	-20 ... +60
vibration (sinusoidal)	IEC 60068-2-6:2008 1.5 mm p-p at f = 10 - 57 Hz, 10 cycles per axis 10 g at f = 58 - 2000 Hz, 10 cycles per axis
shock (semi-sinusoidal)	IEC 60068-2-27:2009 30 g / 11 ms, 6 jolts per axis and direction

- 1) Measurement with Baumer standardized measuring equipment and targets depending on measuring distance Sd
- 2) Measurement on 90% remission (white)
- 3) Measurement with reduced Field of View (start of measurement range 140 mm, end of measurement range 150 mm)
- 4) Measurement with measuring type average
- 5) Measurement with filtering