KombiSIGN 50 / LED Bulb

# LED Bulb 115VAC RD



**Part No.: 956.100.67**

| MECHANICAL DATA | |
|---|---|
| Height | 41 mm |
| Diameter | 29 mm |
| Materials | PA-GF<br>PC |
| Housing colour | Black |
| Service life optical | 50,000 h maximum |
| Weight with packaging | 14 g |
| Product weight | 10 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 115V |
| Operating voltage type | AC |
| Operating voltage frequency | 60Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 115 VAC |
| Rated operational current | 15 mA |
| Rated inrush current | 500 mA |


| OPTICAL DATA | |
|---|---|
| Light source | LED |
| Light colour | Red |
| Optical signal image | Permanent |
| Lamp fitting/socket | BA15d |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Bulb

# LED Bulb 115VAC RD

**DRAWING**

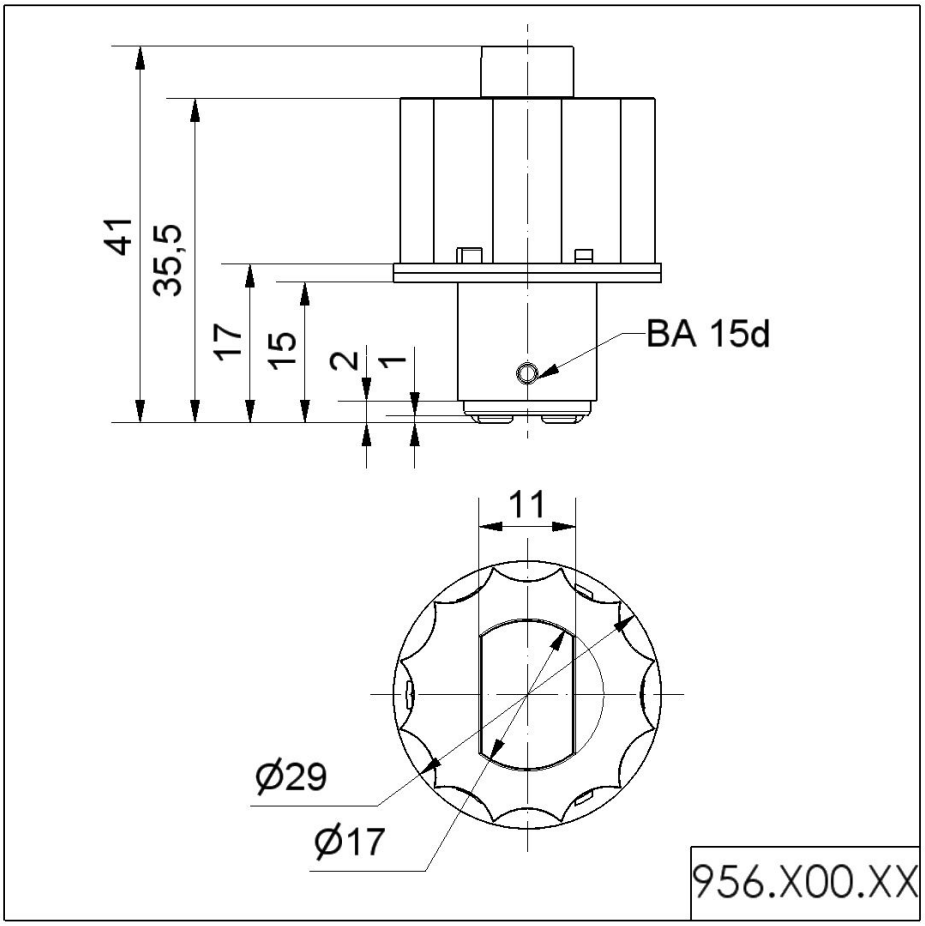


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.