Midi Horns and Sirens / Signal Horn 570

# Signal horn WM Contin. tone 115VAC GY



**Part No.: 570.052.67**

CE RoHS

| MECHANICAL DATA | |
|---|---|
| Length | 152 mm |
| Height | 350 mm |
| Diameter | 148 mm |
| Materials | PC/ABS |
| Housing colour | Grey |
| Protection category | IP55 |
| Connection | Screw terminals |
| cross-sectional area maximum | 2,50mm² / 14AWG |
| Cable entry | Through hole |
| Cable entry maximum | d = 10 mm |
| Type of fixing | Wall mounting |
| Acoustic service life | 250 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 1027 g |
| Product weight | 860 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 115V |
| Operating voltage type | AC |
| Operating voltage frequency | 60Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 115 VAC |
| Rated operational current | 200 mA |
| Rated inrush current | <500mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| ACUSTICAL DATA | |
|---|---|
| Volume/dB(max) at 1m distance | 108,0 dB (A) |
| Acoustic signal image | Continuous tone |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / Signal Horn 570

# Signal horn WM Contin. tone 115VAC GY

**DRAWING**

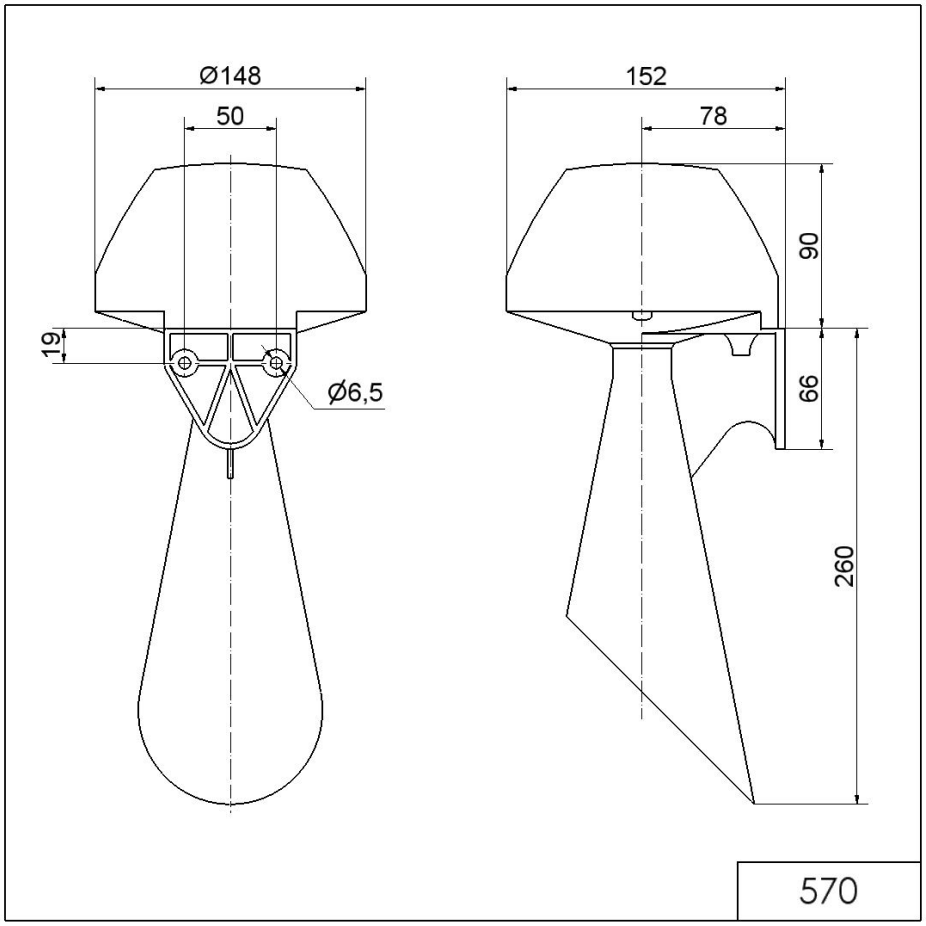


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.