Micro installation beacon / Flashing Light 232

# Flashing Beacon EM 24VDC YE



**Part No.: 232.300.55**

CE RoHS

| MECHANICAL DATA | |
|---|---|
| Height | 80 mm |
| Diameter | 29 mm |
| Materials | PC<br>PC/ABS |
| Dome colour | Yellow |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Cable |
| Cable length | 600 mm |
| Type of fixing | Built-in mounting |
| Service life optical | 4 million flashes minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 69 g |
| Product weight | 45 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 140 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3<br>In the connection area: 2 |


| OPTICAL DATA | |
|---|---|
| Light source | Xenon |
| Light colour | Yellow |
| Optical signal image | Flash |
| Flash frequency | 1.5 Hz |
| Flash output | 1 J |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Micro installation beacon / Flashing Light 232

# Flashing Beacon EM 24VDC YE

**DRAWING**

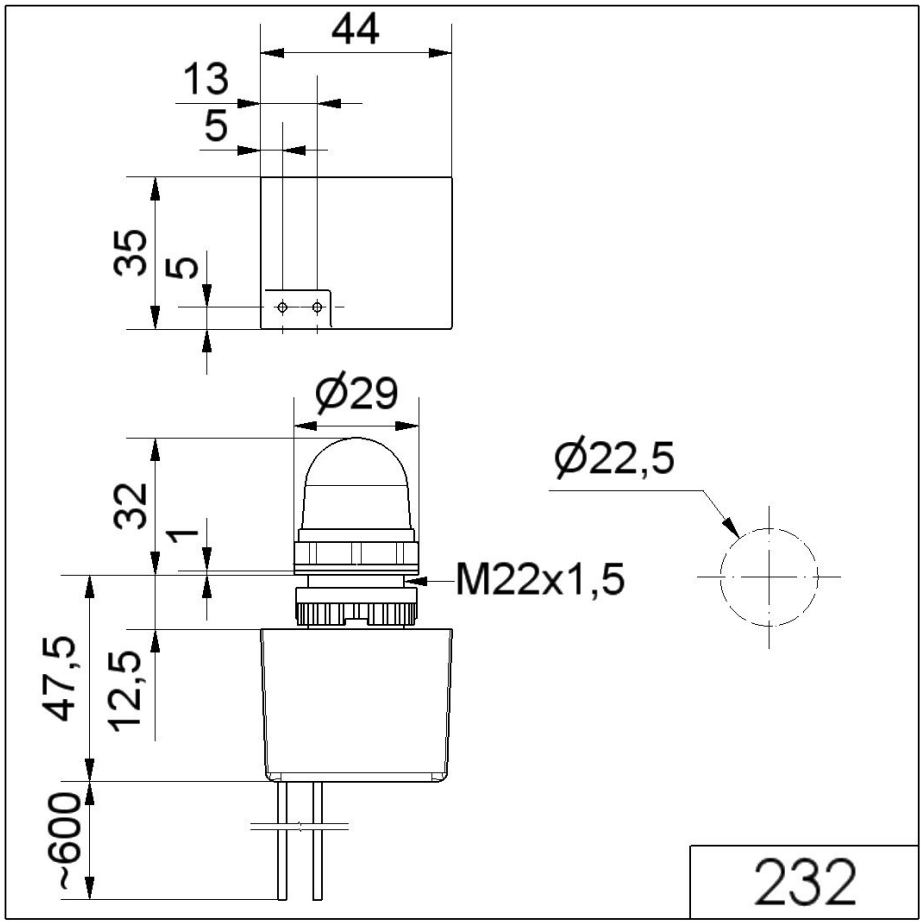


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.