KombiSIGN 70 / LED Blinking Beacon 843

# LED Blinking light element 230VAC RD



| | |
|---|---|
| **Part No.:** | **843.110.68** |
| **Series:** | **KombiSIGN 70** |

| MECHANICAL DATA | |
|---|---|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Red |
| Protection category | IP54 |
| Service life optical | 100,000 h maximum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 84 g |
| Product weight | 70 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 35 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| OPTICAL DATA | |
|---|---|
| Light source | LED |
| Light colour | Red |
| Optical signal image | Blink |
| Blink frequency (Hz) | 1 Hz |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / LED Blinking Beacon 843

# LED Blinking light element 230VAC RD

**DRAWING**

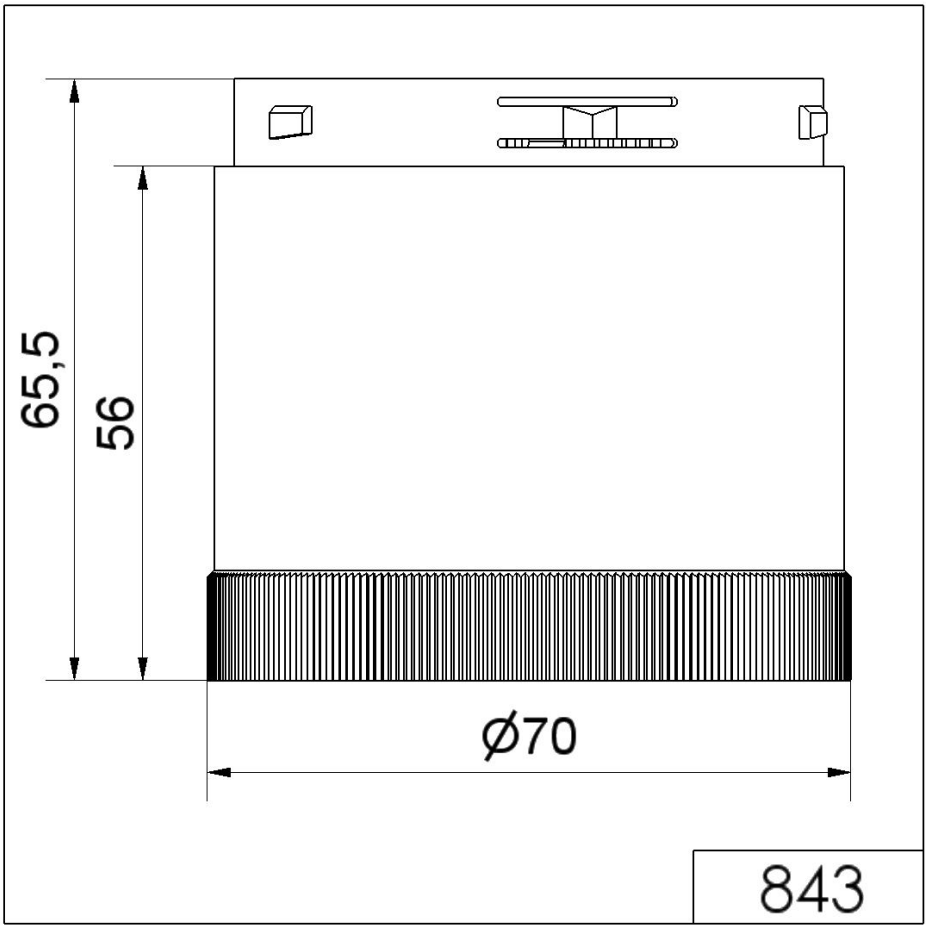


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.