Mini installation beacon / LED Beacon 207

# LED Perm. Beacon EM 230VAC RD




**Part No.: 207.100.68**

| MECHANICAL DATA | |
|---|---|
| Height | 103 mm |
| Diameter | 58 mm |
| Materials | PA-GF<br>PC |
| Dome colour | Red |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Flat plug |
| Type of fixing | Built-in mounting |
| Service life optical | 100,000 h maximum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 77 g |
| Product weight | 55 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 25 mA |
| Rated inrush current | 1.000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3<br>In the connection area: 2 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| OPTICAL DATA | |
|---|---|
| Light source | LED |
| Light colour | Red |
| Optical signal image | Permanent |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini installation beacon / LED Beacon 207

# LED Perm. Beacon EM 230VAC RD

**DRAWING**

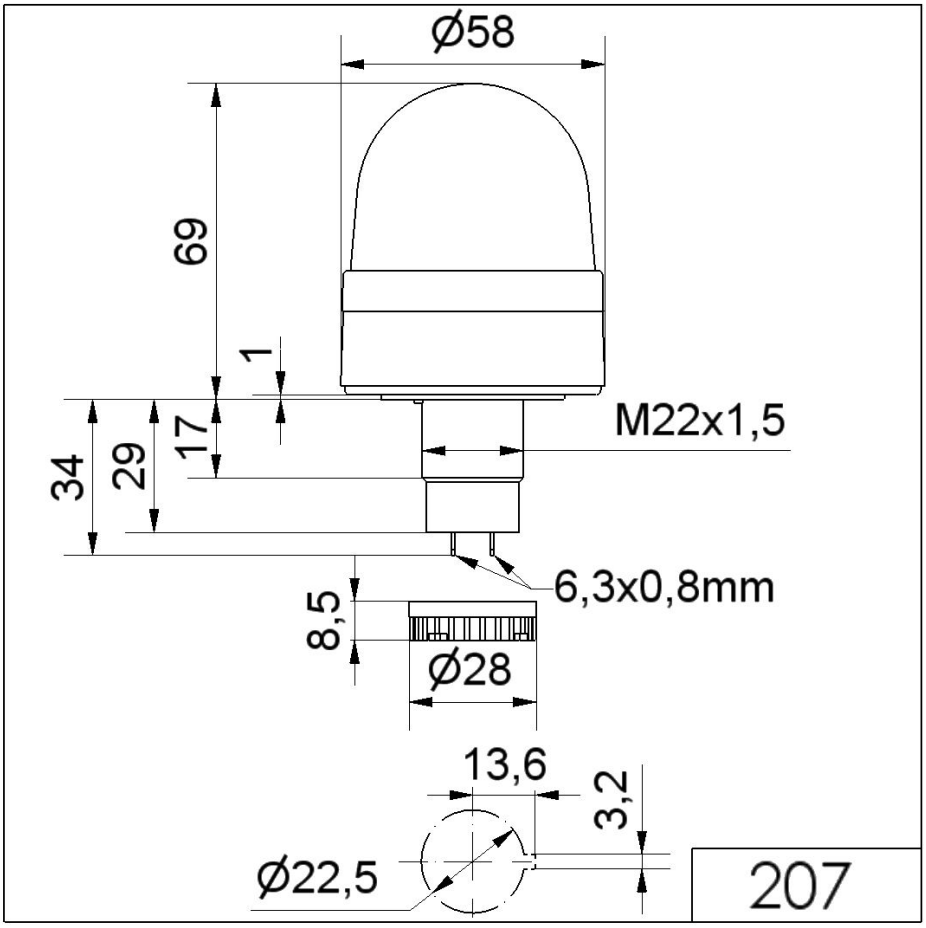


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.