KombiSIGN 70 / Terminal Element

# Terminal element M12 BM 12-24VDC BK




| | |
|---|---|
| **Part No.:** | **840.850.55** |
| **Series:** | **KombiSIGN 70** |

CE RoHS

| **MECHANICAL DATA** | |
|---|---|
| Height | 44 mm |
| Diameter | 70 mm |
| Materials | PA-GF<br>PC/ABS |
| Housing colour | Black |
| Protection category | IP54 |
| Connection | M12 plug 8-pole |
| Type of fixing | Base mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 123 g |
| Product weight | 104 g |


| **ELECTRICAL DATA** | |
|---|---|
| Operating voltage | 12-24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Terminal Element

# Terminal element M12 BM 12-24VDC BK

## DRAWING

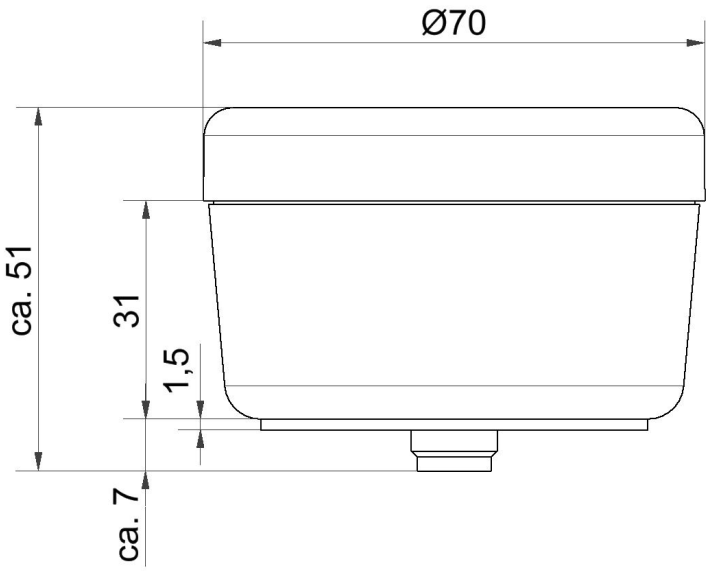


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.