KombiSIGN 70 / Audible Devices 844

Siren element alternating 24VDC BK



Part No.:	**844.123.55**
Series:	**KombiSIGN 70**

CE RoHS

MECHANICAL DATA	
Height	79 mm
Diameter	70 mm
Materials	PC PC/ABS
Housing colour	Black
Protection category	IP40
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	144 g
Product weight	128 g


ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	100 mA
Rated inrush current	<10A
Protection class	Protection class 2
Pollution degree	2

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Audible Devices 844

Siren element alternating 24VDC BK

DRAWING

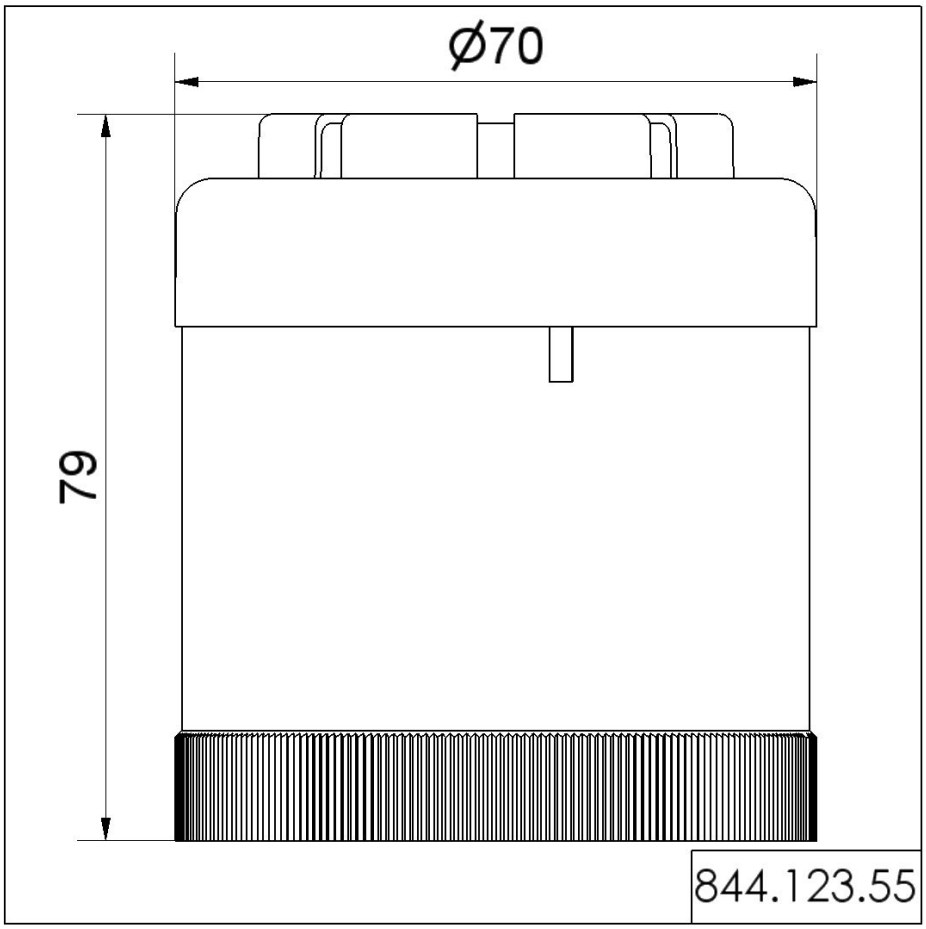

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.