KombiSIGN 40 / ClassicLOOK

# Terminal element IO-Link 24VDC BK



| | |
|---|---|
| **Part No.:** | **631.800.55** |
| **Series:** | **KombiSIGN 40** |

| MECHANICAL DATA | |
|---|---|
| Height | 59 mm |
| Diameter | 40 mm |
| Materials | PC |
| Housing colour | Black |
| Protection category | IP66<br>IP69K |
| Connection | Push-in terminal |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Service life optical | 50,000 h maximum |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 51 g |
| Product weight | 35 g |


| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 6 mA |
| Rated inrush current | 400 mA |
| Protection class | Protection class 3 |
| Pollution degree | 3 |
| Request to external PSU | SELV/PELV |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

# Terminal element IO-Link 24VDC BK

**DRAWING**

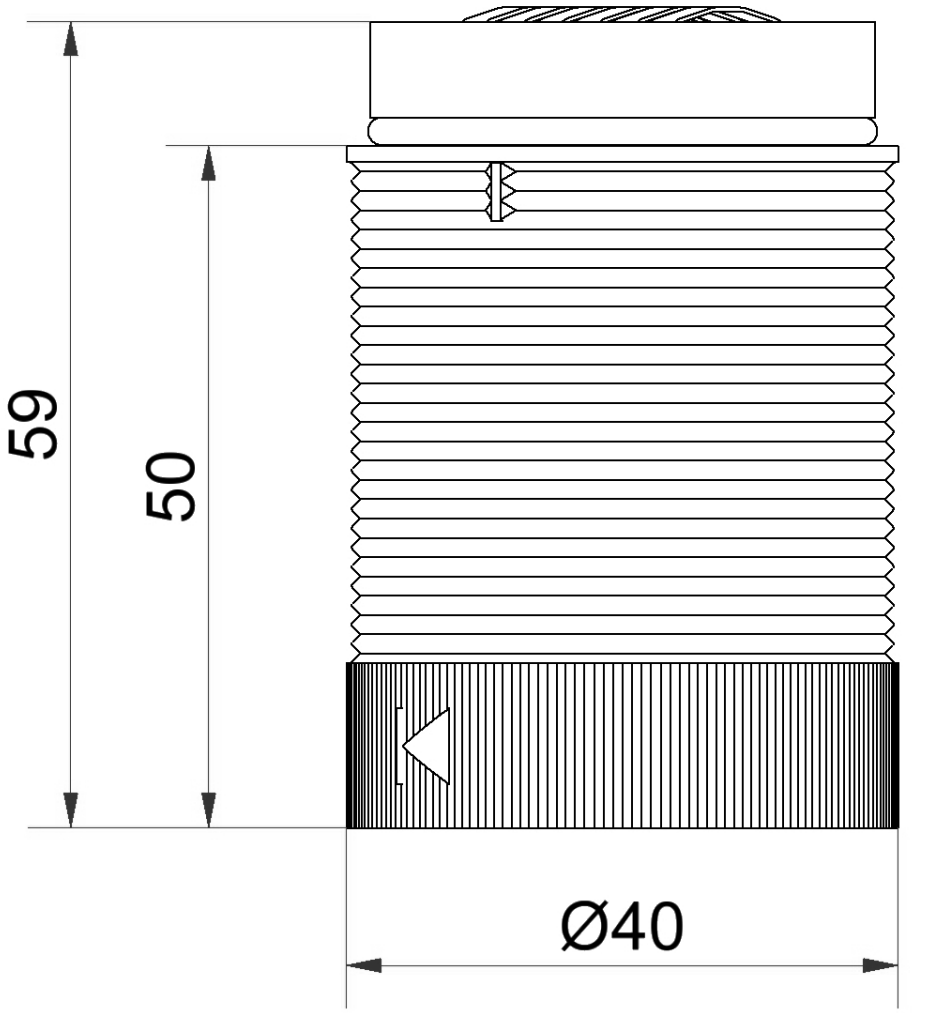


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.