
HG 22

Incremental encoder with optical sensing

Through hollow shaft ø90...120 mm / 720…4000 pulses per revolution

Overview

- Large axial and radial displacement of the shaft permitted
- Fit for high operating speed
- Robust and wearless
- Max. 4000 pulses per revolution
- Output stage TTL with regulator UB 9...26 VDC

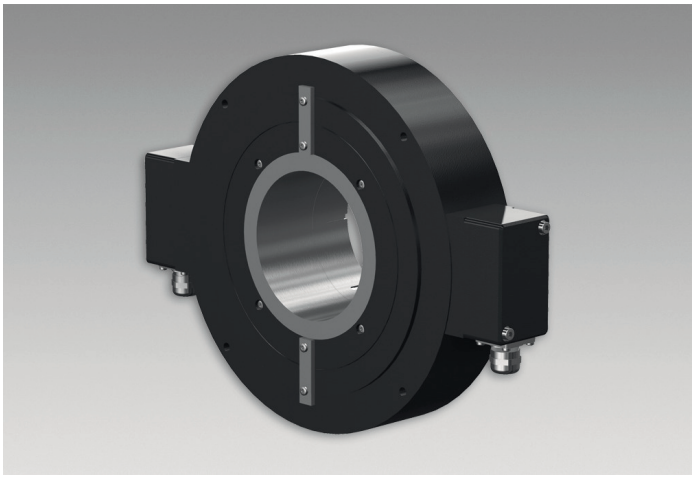

HTL TTL® HÜBNER BERLIN A Baumer Brand

Technical data

Technical data - electrical ratings	
Voltage supply	9...26 VDC 5 VDC ±5 %
Consumption w/o load	≤100 mA
Pulses per revolution	720 … 4000
Output signals	K1, K2, K0 + inverted
Reference signal	Zero pulse, width 90°
Output frequency	≤120 kHz
Phase shift	90 ° ±20°
Duty cycle	40…60 %
Sensing method	Optical
Output stages	HTL TTL/RS422
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	CE UL approval / E217823
Technical data - mechanical design	
Size (flange)	ø227 mm

Technical data - mechanical design	
Shaft type	ø90...120 mm (through hollow shaft)
Axial tolerance	-0,5 … 1,5 mm (with zero pulse) -0,5 … 2,5 mm (without zero pulse)
Radial tolerance	±0,05 mm (with zero pulse) ±0,2 mm (without zero pulse)
Protection DIN EN 60529	IP 44
Operating speed	≤12000 rpm
Material	Housing: aluminium Shaft: stainless steel
Rotor moment of inertia	67,3 kgcm²
Operating temperature	-30...+70 °C
Resistance	IEC 60068-2-6 Vibration 10 g, 10...2000 Hz IEC 60068-2-27 Shock 100 g, 6 ms
Weight approx.	5,8 kg
Connection	Terminal box (2x with option M) Flange connector M23, 12-pin (2x with option M)

Optional

- Electrical connection with flange connector and mating connector
- Redundant sensing (option M)


2020-03-27 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

HG 22


Incremental encoder with optical sensing
Through hollow shaft ø90...120 mm / 720…4000 pulses per revolution

Terminal assignment

View A *(see dimension)*
Connecting terminal terminal box

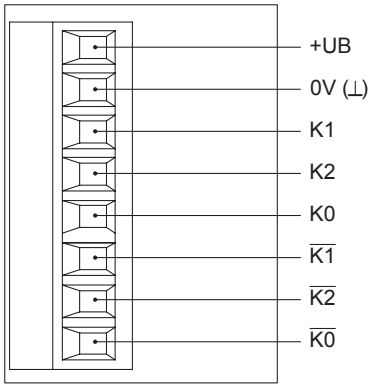

View B *(see dimension)*
Assignment flange connector



Flange connector M23,
male, 12-pin,
clockwise (CW)


Pin	Assignment
1	$\overline{K2}$
2	dnu
3	K0
4	$\overline{K0}$
5	K1
6	$\overline{K1}$
7	dnu
8	K2
9	dnu
10	0V (⊥)
11	dnu
12	+UB

Terminal significance

+UB	Voltage supply
0V (⊥)	Ground
K1	Output signal channel 1
$\overline{K1}$	Output signal channel 1 inverted
K2	Output signal channel 2 (offset by 90° to channel 1)
$\overline{K2}$	Output signal channel 2 inverted
K0	Zero pulse (reference signal)
$\overline{K0}$	Zero pulse inverted
dnu	Do not use

Output signals

HTL/TTL
At positive rotating direction *(see dimension)*

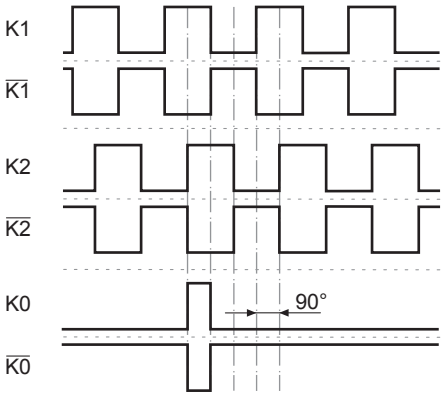


2020-03-27 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

HG 22

Incremental encoder with optical sensing

Through hollow shaft ø90...120 mm / 720…4000 pulses per revolution

Dimensions

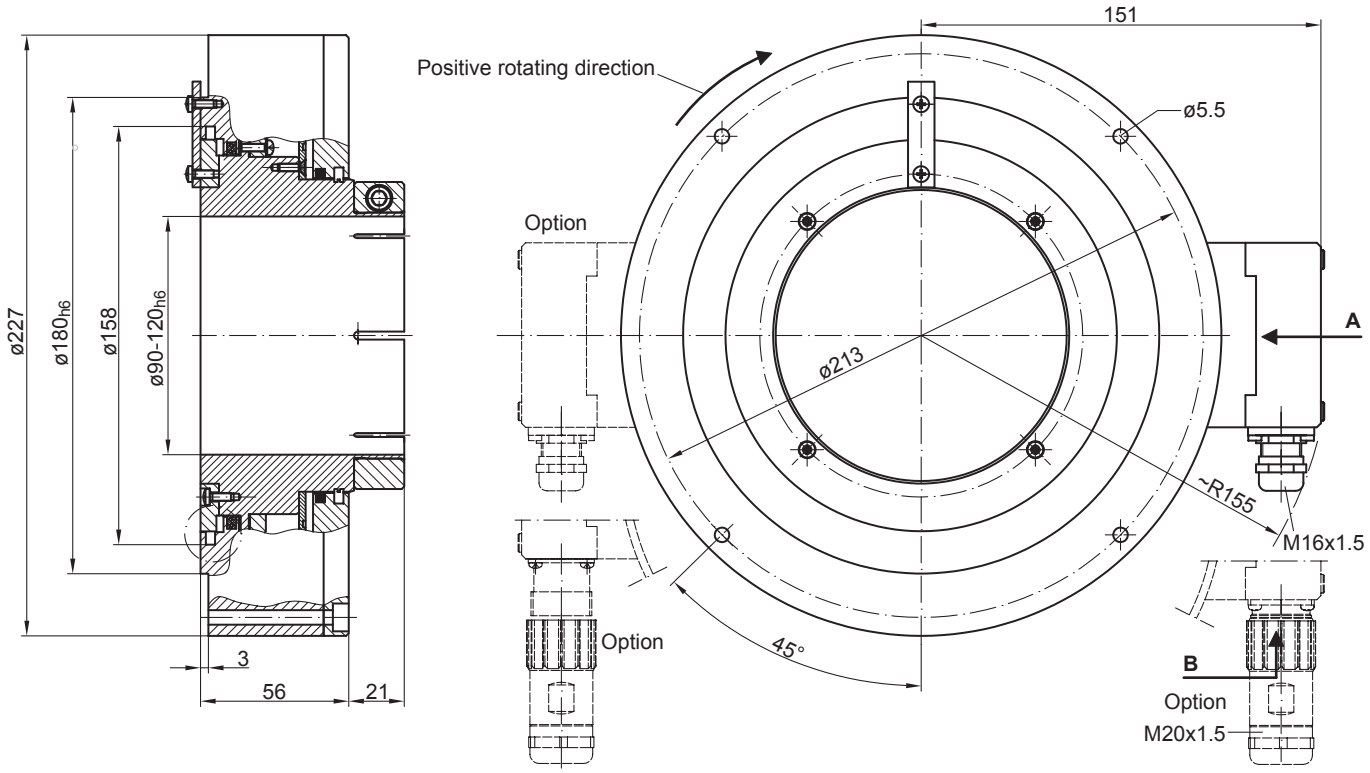

2020-03-27 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

HG 22

Incremental encoder with optical sensing

Through hollow shaft ø90...120 mm / 720…4000 pulses per revolution

Ordering reference

	HG22	#	DN	####	###
Product					
Incremental encoder	HG22				
Redundant sensing					
Without redundant sensing					
With redundant sensing		M			
Output signals					
K1, K2, K0			DN		
Pulse number(1)					
720				720	
1800				1800	
2400				2400	
4000				4000	
Voltage supply / output stage					
9...26 VDC / HTL (C)					CI
5 VDC / output stage TTL with inverted signals					TTL
9...30 VDC / output stage TTL with inverted signals					R

(1) Other pulse numbers on request.

Accessories

Connectors and cables	
	Sensor cable for encoders HEK 8

Diagnostic accessories	
11075858	Analyzer for encoders HENQ 1100
11075880	Analyzer for encoders HENQ 1100 B

2020-03-27 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.