TE2

Compact RTD temperature sensor

TE2-#.#.####.####.0

Overview

- Compact and rugged design
- Customer-specific immersion depth down to 3000 mm
- Precision measurement from -50 ... 250 °C
- Integrated 4 ... 20 mA transmitter or Pt100 output
- Easy process implementation from DN 25 or in tank



EN 50155

Technical data

Performance characteristics	
Pt100 accuracy class (EN 60751)	B (± 0.3 °C at 0 °C) ± (0.3 + 0.005 × t)°C A (± 0.15 °C at 0 °C) ± (0.15 + 0.002 × t)°C 1/3 B (± 0.1 °C at 0 °C) ± 1/3 × (0.3 + 0.005 × t)°C 1/6 B (± 0.05 °C at 0 °C) ± 1/6 × (0.3 + 0.005 × t)°C
Response time, T50	≤ 1.0 s , conical sensor ≤ 1.3 s , Ø3 mm ≤ 2.5 s , Ø4 mm ≤ 3.0 s , Ø6 mm
Process temperature	Refer to section "Operating conditions"
Process connection	
Connection variants	Refer to section "Dimensional drawings"
Sensor length	≤ 3000 mm
Sensor diameter outside	ø 6 mm
Mounting position	Any, top, bottom, side
Standard response tip	ø 6 mm
Fast response tip	ø 3 mm ø 4 mm
Sensor tube material	AISI 316L (1.4404)
Surface roughness wetted parts	Ra ≤ 0.8 µm
Ambient conditions	
Operating temperature range	-40 … 125 °C , with Pt100 -40 … 85 °C , with transmitter
Storage temperature range	-55 … 90 °C
Degree of protection (EN 60529)	IP 65 , with DIN EN 175301-803 A (DIN 43650 A), 4-pin IP 67 , with M12-A, 4-pin
Humidity	≤ 100 % RH , condensing

Ambient conditions	
Long-term test (transmitter)	IEC 770 6.3.2
Vibration (sinusoidal) (EN 60068-2-6)	1.6 mm p-p (2 … 25 Hz), 4 g (25 … 100 Hz), 1 octave / min.
Output signal	
Without transmitter	1 x Pt100, 4-wire
With transmitter	4 … 20 mA , 2-wire
Housing	
Style	Compact transmitter
Overall size	Refer to section "Dimensional drawings"
Material	AISI 304 (1.4301)
Electrical connection	
Connector	DIN EN 175301-803 A (DIN 43650 A), 4-pin M12-A, 4-pin
Power supply	
Voltage supply range	8 … 35 V DC
Power-up time	< 20 s
Reverse polarity protection	Yes
Factory settings	
Output range	0 … 150 °C
Damping	0 s
Output at sensor fault	23 mA
Compliance and approvals	
EMC	EN 61000-6-2 EN 61000-6-3 EN 61326-1 NE21
Hygiene	FDA (21 CFR 177.2415) 3-A (74-07)
Railway applications	EN 50155
Explosion protection	Ex ia Simple apparatus, gas and dust

2020-05-11 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

TE2

Compact RTD temperature sensor
TE2-#.#.####.####.0

Transmitter

Input

Measuring unit	°C °F
Min. measuring span	25 °C
Sample time	< 0.7 s
Accuracy	< 0.25 °C , @ ≤ 100 °C
Repeatability	< 0.1 °C
Resolution	14 bit
Ripple immunity	IEC 770 6.2.4.2
Error detection delay	< 10 s
Offset adjustment	± 10 °C , max.
Isolation, sensor to case	50 V AC , test 500V
Protection	± 35 V DC
Suppression	50 Hz 60 Hz

Output

Output signal	4 … 20 mA , 2-wire
Accuracy	< 0.1 % , measuring span < 0.016 mA
Temperature drift	< 0.003 %/K , typ. < 0.01 %/K , max.
Resolution	12 bit
Effect of variations in supply voltage	< 0.01 %/V
Ripple immunity	3 Vrms
Shunt resistance	Rs ≤ (V DC - 8 V)/0.023 A
Damping	0.0 … 30.0 s , programmable
Up/Down scaling limits	23 mA / 3.5 mA

Operating conditions

Ordering key	Process connection	BCID	Process pressure	Continuous Process temperature Standard @ Tamb ≤ 20 °C	Process temperature With cooling neck @ Tamb ≤ 20 °C
			(bar)	(° C)	(° C)
TE2-#.1.####.####.#	Sleeve Ø 6	T65	-1 … 40	-50 … 125	-50 … 250
TE2-#.3.####.####.#	G 1/2 A ISO 228-1	G06	-1 … 100	-50 … 125	-50 … 250
TE2-#.4.####.####.#	G 1/2 A hygienic	A03	-1 … 40	-50 … 125	-50 … 250
TE2-#.5.####.####.#	M12 × 1.5 hygienic	A02	-1 … 40	-50 … 125	-50 … 250
TE2-#.6.####.####.#	M12 × 1.5 hygienic, with PEEK cone	A02	-1 … 10	-50 … 115	N/A
TE2-#.7.####.####.#	G 1/8 male thread hygienic	A01	-1 … 40	-50 … 205	-50 … 250
TE2-#.8.####.####.#	G 1/4 A DIN 3852-E	G50	-1 … 100	-50 … 125	-50 … 250
TE2-#.9.####.####.#	ISO 2852 (Tri-Clamp), DN 33.7; 38, Ø 50.5	C04	-1 … 40	-50 … 125	-50 … 250
TE2-#.A.####.####.#	Tri-Clamp Ø 24.9	C01	-1 … 40	-50 … 125	-50 … 250
TE2-#.B.####.####.#	BHC 3A DN 38	B01	-1 … 40	-50 … 125	-50 … 250
TE2-#.D.####.####.#	1/2-14 NPT	N02	-1 … 100	-50 … 125	-50 … 250
TE2-#.E.####.####.#	1/4-18 NPT	N01	-1 … 100	-50 … 125	-50 … 250
TE2-#.F.####.####.# TE2-#.G.####.####.#	G 1/2 A DIN 3852-E	G51	-1 … 100	-50 … 125	-50 … 250

For further information on permissible process and ambient temperatures, please refer to the operating instructions.

The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.
2020-05-11

TE2

Compact RTD temperature sensor
TE2-#.#.####.####.0


Compliance and approvals

Ordering key	Process connection	BCID	EN 10/2011	EN 1935/2004 EN 2023/2006	FDA	3-A
TE2-#.1.####.####.#	Sleeve Ø 6	T65				
TE2-#.3.####.####.#	G 1/2 A ISO 228-1	G06				
TE2-#.4.####.####.#	G 1/2 A hygienic	A03		■		
TE2-#.5.####.####.#	M12 × 1.5 hygienic	A02		■		
TE2-#.6.####.####.#	M12 × 1.5 hygienic, with PEEK cone	A02	■	■	■	
TE2-#.7.####.####.#	G 1/8 male thread hygienic	A01		■		
TE2-#.8.####.####.#	G 1/4 A DIN 3852-E	G50				
TE2-#.9.####.####.#	ISO 2852 (Tri-Clamp), DN 33.7; 38, Ø 50.5	C04		■		■
TE2-#.A.####.####.#	Tri-Clamp Ø 24.9	C01		■		
TE2-#.B.####.####.#	BHC 3A DN 38	B01		■		■
TE2-#.D.####.####.#	1/2-14 NPT	N02				
TE2-#.E.####.####.#	1/4-18 NPT	N01				
TE2-#.F.####.####.# TE2-#.G.####.####.#	G 1/2 A DIN 3852-E	G51				


The requirements of the respective 3-A Sanitary Standard will be only fulfilled in combination with appropriate mounting accessories. Those are marked with the 3-A logo.

Dimensional drawings (mm)


Housing



Housing with connector M12-A, 4-pin



Housing with transmitter and connector M12-A, 4-pin



Housing with connector DIN EN 175301-803 A (DIN 43650 A), 4-pin

2020-05-11 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.


TE2

Compact RTD temperature sensor

TE2-#.#.####.####.0


Dimensional drawings (mm)

Housing




Housing with transmitter and connector DIN EN 175301-803 A (DIN 43650 A), 4-pin


Process connection




Without thread (BCID: T65)




G 1/2 A ISO 228-1 (BCID: G06)

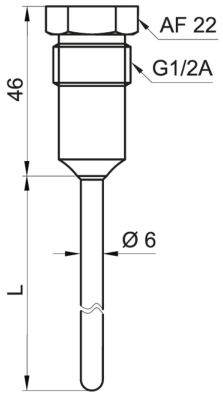


G 1/2 A hygienic (BCID: A03)



M12 × 1.5 hygienic (BCID: A02)



M12 × 1.5 hygienic, PEEK cone, tip Ø 3 x 5 mm (BCID: A02)



G 1/8 male thread hygienic (BCID: A01)

2020-05-11 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.


TE2

Compact RTD temperature sensor


TE2-#.#.####.####.0

Dimensional drawings (mm)


Process connection




G 1/4 A DIN 3852-E (BCID: G50)




Tri-Clamp Ø 50.5 (BCID: C04)




Tri-Clamp Ø 24.9 (BCID: C01)

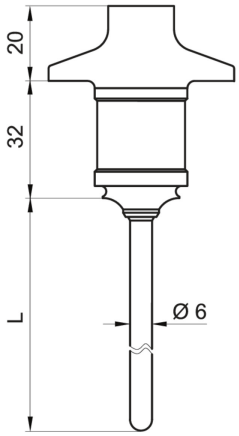


BHC 3A DN 38 (BCID: B01)



1/2-14 NPT (BCID: N02)




1/4-18 NPT (BCID: N01)



G 1/2 A DIN 3852-E (BCID: G51)











Standard response tip



Fast response tip

2020-05-11 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

Electrical connection

Output type	Electrical connection	Equivalent circuit	Function	Pin assignment
	M12-A, 4-pin, stainless steel			
Pt100 (Single element)			Pt100 11 Pt100 12 Frame ground	1, 2 3, 4 Plug thread
Pt100 (Double element)			Pt100 11 Pt100 12 Pt100 21 Pt100 22 Frame ground	1 4 2 3 Plug thread
4 … 20 mA, 2-wire, Iout at pin 2			+Vs Iout N.C. Frame ground	1 2 3, 4 Plug thread
4 … 20 mA, 2-wire, Iout at pin 2, 3			+Vs Iout N.C. Frame ground	1 2, 3 4 Plug thread
	DIN EN 175301-803 A (DIN 43650 A), 4-pin			
Pt100 (Single element)			N.C. Pt100 11 Pt100 12 Frame ground	1 2 3 Grounding lug
4 … 20 mA, 2-wire			+Vs Iout N.C. Frame ground	1 2 3 Grounding lug

Ordering information

Ordering key - Configuration possibilities see website

	#	#	#	-	#	.	#	.	#	####	#
Sensor tip											
Not specified	0										
Standard response tip, Ø 6 mm	1										
Fast response tip, Ø 4 mm	2										
Fast response tip, Ø 3 mm	3										

2020-05-11 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

TE2

Compact RTD temperature sensor

TE2-#.#.####.####.0

Ordering information

Ordering key - Configuration possibilities see website

	#	#	#	-	#	.	#	.	#	####	#
Process Connection											
Tube without connection		1									
G 1/2 A ISO 228-1 (G06)		3									
G 1/2 A hygienic (A03)		4									
M12 × 1.5 hygienic (A02)		5									
M12 × 1.5 hygienic, PEEK cone, sensor tip Ø 3x5 mm (A02)		6									
G1/8 ISO 228/1 female thread, Hygienic (A01)		7									
G 1/4 A DIN 3852-E, with NBR seal (G50)		8									
ISO 2852 (Tri-Clamp), DN 25; 33.7; 38, Ø 50.5 (C04)		9									
DIN 32676-C (Tri-Clamp), DN 3/4, Ø 24.9 (C01)		A									
BHC 3A DN 38 (B01)		B									
1/2-14 NPT (N02)		D									
1/4-18 NPT (N01)		E									
G 1/2 A DIN 3852-E, with FKM seal (G51)		F									
G 1/2 A DIN 3852-E, with EPDM seal (G51)		G									
Sensor element											
1/1 B EN 60751, single			1								
1/1 B EN 60751, duplex			2								
1/3 B EN 60751, single			3								
1/3 B EN 60751, duplex			4								
1/6 B EN 60751, single			5								
1/6 B EN 60751, duplex			6								
1/1 A EN 60751, single			7								
1/1 A EN 60751, duplex			8								
Cooling neck											
Without cooling neck					0						
With cooling neck					4						
Electrical connection											
M12-A, 4-pin, stainless steel							1				
M12-A, 4-pin, stainless steel, with integrated transmitter							2				
DIN EN 175301-803 A (DIN 43650 A), 4-pin							4				
DIN EN 175301-803 A (DIN 43650 A), 4-pin, with integrated transmitter							5				
M12-A, 4-pin, stainless steel, with integrated transmitter, Iout pin 2+3							A				
Certificates											
Not specified									0		
Railway EN 50155									4		
Ex ia Simple apparatus, gas and dust									9		
Sensor tube length (mm)											
5 - 3000										####	
Configuration											
No configuration											0
Configuring according to customer specification											C

2020-05-11 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.