KombiSIGN 70 / AS-Interface-Device

AS-Interface-Module - A/B technology BK



Part No.:	**840.810.55**
Series:	**KombiSIGN 70**

MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Black
Protection category	IP54
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	120 g
Product weight	98 g


ELECTRICAL DATA	
Operating voltage	18,5 - 31,6V (ASI)
Rated operational current	210 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	PELV
AS-i Slave Type	A/B
AS-i Profile	S-8.A.E


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / AS-Interface-Device

AS-Interface-Module - A/B technology BK

DRAWING

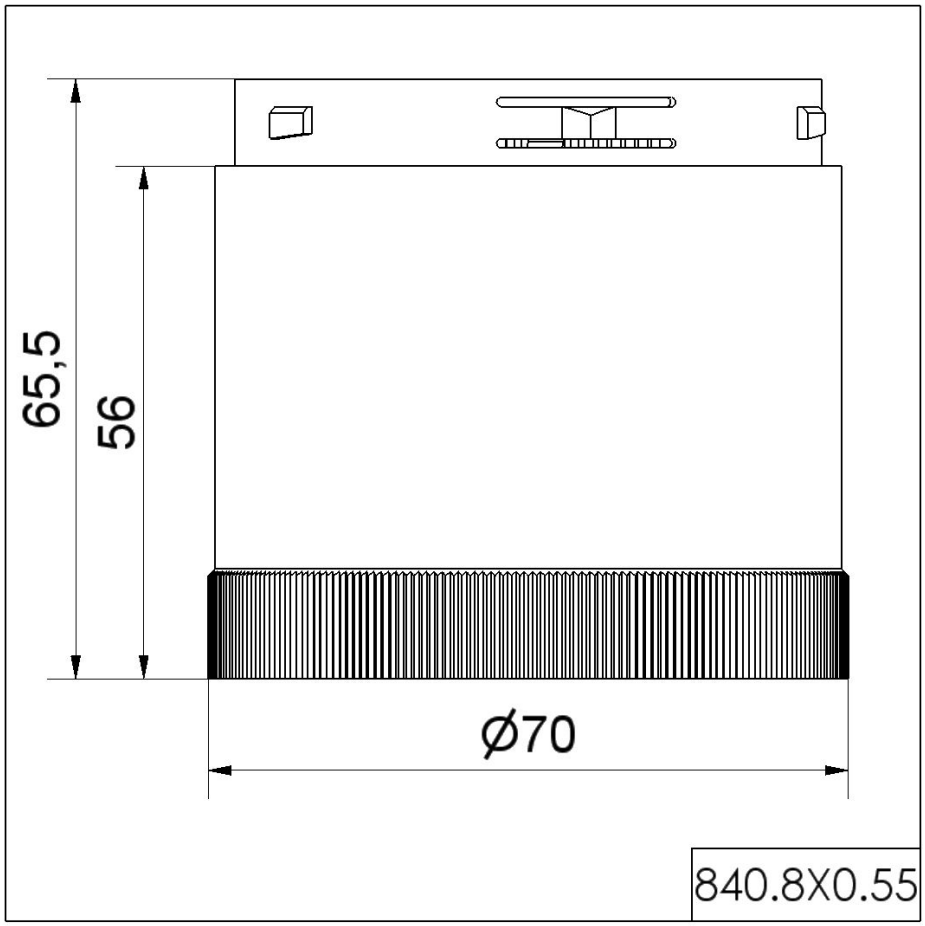

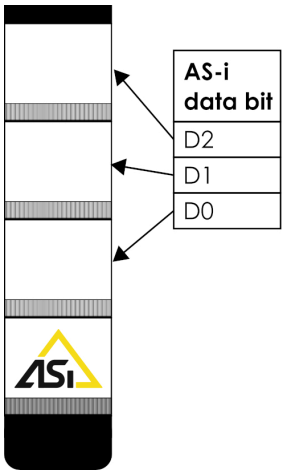

	Supply internal (BUS)	Supply external (AUX)
Voltage	18,5-31,6 V PELV	20-30 V DC PELV
Output current	Σ 200 mA	300 mA per tier
Supply (BUS/AUX)	switchable	
Master profile	min. M3	

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.