Modular Signal Towers / KombiSIGN 72

# Siren element 8 tne 24VAC/DC GY



| | |
|---|---|
| **Part No.:** | **645.790.75** |
| **Series:** | **KombiSIGN 72** |

| MECHANICAL DATA | |
|---|---|
| Height | 54 mm |
| Diameter | 70 mm |
| Materials | PC |
| Housing colour | Grey |
| Protection category | IP65 |
| Acoustic service life | 5,000 h minimum |
| Working temperature minimum | -30°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 93 g |
| Product weight | 73 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 30 mA |
| Rated inrush current | 250 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |


| ACUSTICAL DATA | |
|---|---|
| Volume/dB(max) at 1m distance | 102,0 dB (A) |
| Acoustic signal image | Multi-tone |
| Number of tones | 8 tone |
| Volume adjustable | Switch |
| Volume adjustment range | 92 - 102 dB (A) |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72

# Siren element 8 tne 24VAC/DC GY

## DRAWING

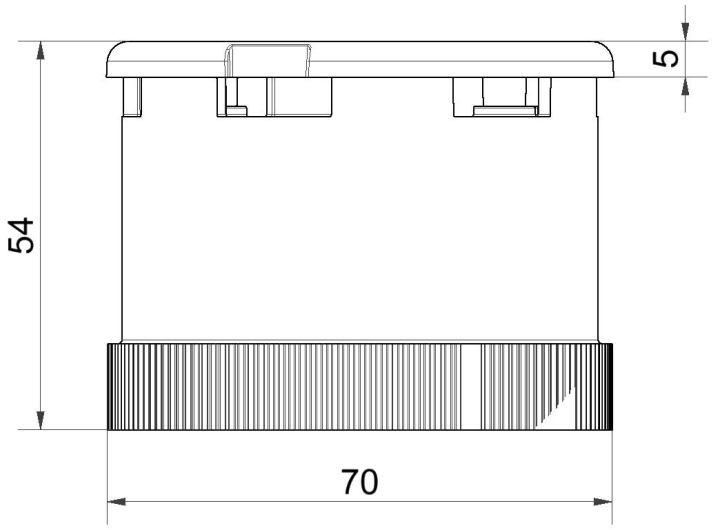


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.