KombiSIGN 71 / WIN

KombiSIGN 71 reflect 24V BK



Part No.: 861.640.01

MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Tension relief	Not present
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	213 g
Product weight	178 g


ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	900 mA
Rated inrush current	430 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	SELV/PELV

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / WIN

KombiSIGN 71 reflect 24V BK

DRAWING

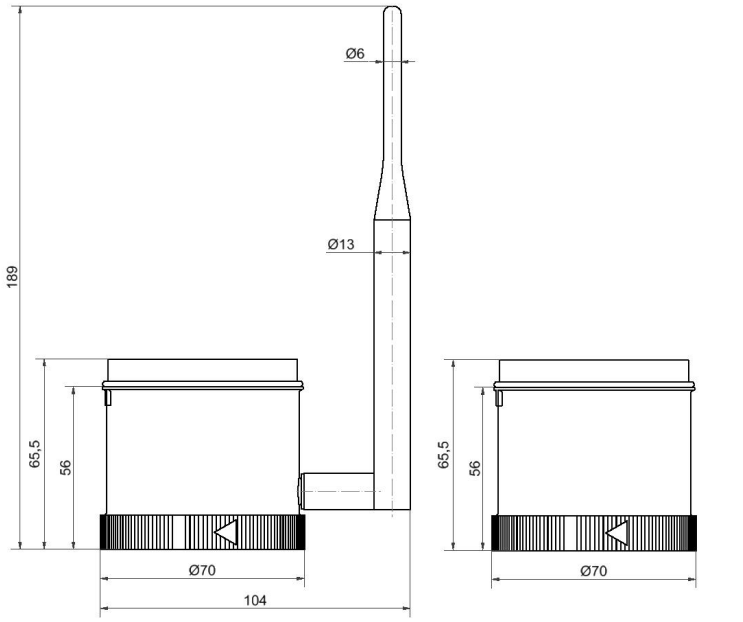

KombiSign reflect master KombiSIGN reflect slave

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.