Midi free-standing Beacons / LED Rotating Beacon 829

# LED Rotat. Beacon RM 24VDC GN




**Part No.: 829.217.55**

| MECHANICAL DATA | |
|---|---|
| Height | 200 mm |
| Diameter | 98 mm |
| Materials | PC<br>PC/ABS |
| Dome colour | Green |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Screw terminals |
| cross-sectional area minimum | 0,50mm² / 20AWG |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Cable entry | Rubber pinch |
| Cable entry minimum | d = 5 mm |
| Cable entry maximum | d = 7 mm |
| Type of fixing | Tube mounting |
| Service life optical | 50,000 h maximum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 330 g |
| Product weight | 260 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 300 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |


| OPTICAL DATA | |
|---|---|
| Light source | LED |
| Light colour | Green |
| Optical signal image | Revolving |
| Rotation frequency (rpm) | 180 U/min |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / LED Rotating Beacon 829

# LED Rotat. Beacon RM 24VDC GN

**DRAWING**

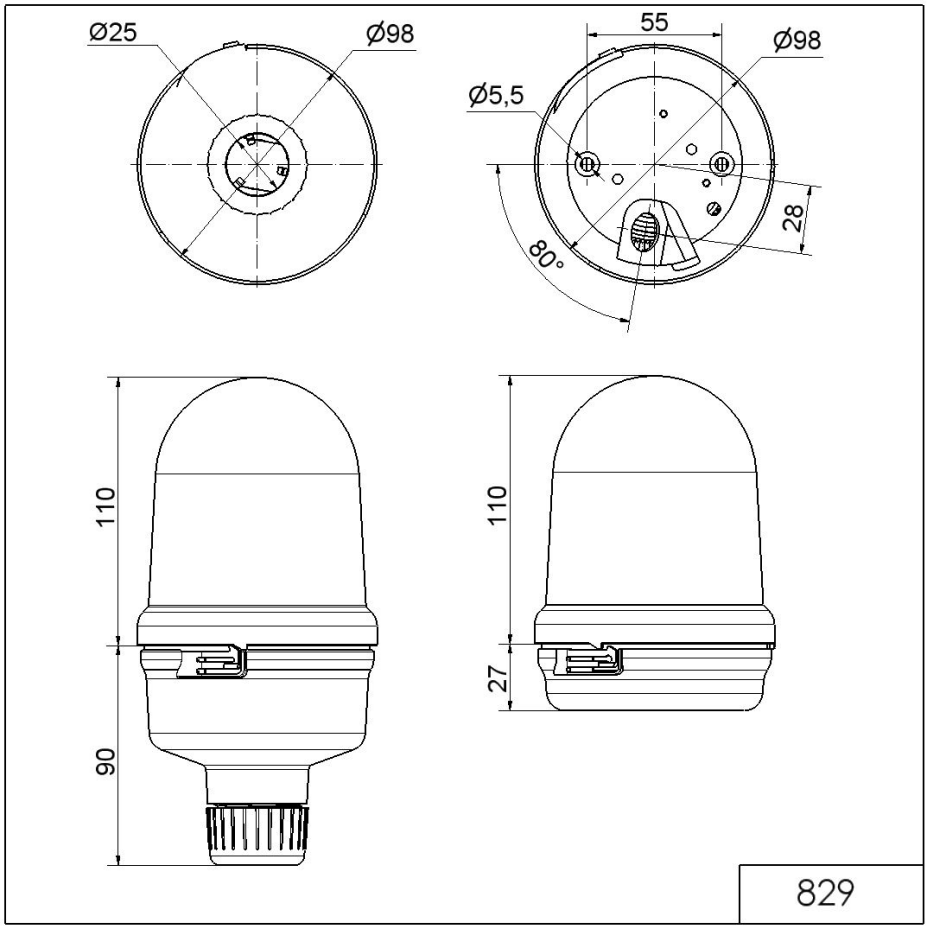


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.