Midi free-standing Beacons / Flash Light 828

# Flashing Beacon BM 12VDC YE



**Part No.: 828.300.54**

| MECHANICAL DATA | |
|---|---|
| Height | 137 mm |
| Diameter | 98 mm |
| Materials | PC<br>PC/ABS |
| Dome colour | Yellow |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Screw terminals |
| cross-sectional area maximum | 2,50mm² / 14AWG |
| Cable entry | Rubber pinch |
| Cable entry minimum | d = 5 mm |
| Cable entry maximum | d = 7 mm |
| Type of fixing | Base mounting |
| Service life optical | 4 million flashes minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +45°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 267 g |
| Product weight | 223 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 12V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 12 VDC |
| Rated operational current | 500 mA |
| Rated inrush current | 12.000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |


| OPTICAL DATA | |
|---|---|
| Light source | Xenon |
| Light colour | Yellow |
| Optical signal image | Flash |
| Flash frequency | 1 Hz |
| Flash output | 5 J |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / Flash Light 828

# Flashing Beacon BM 12VDC YE

**DRAWING**

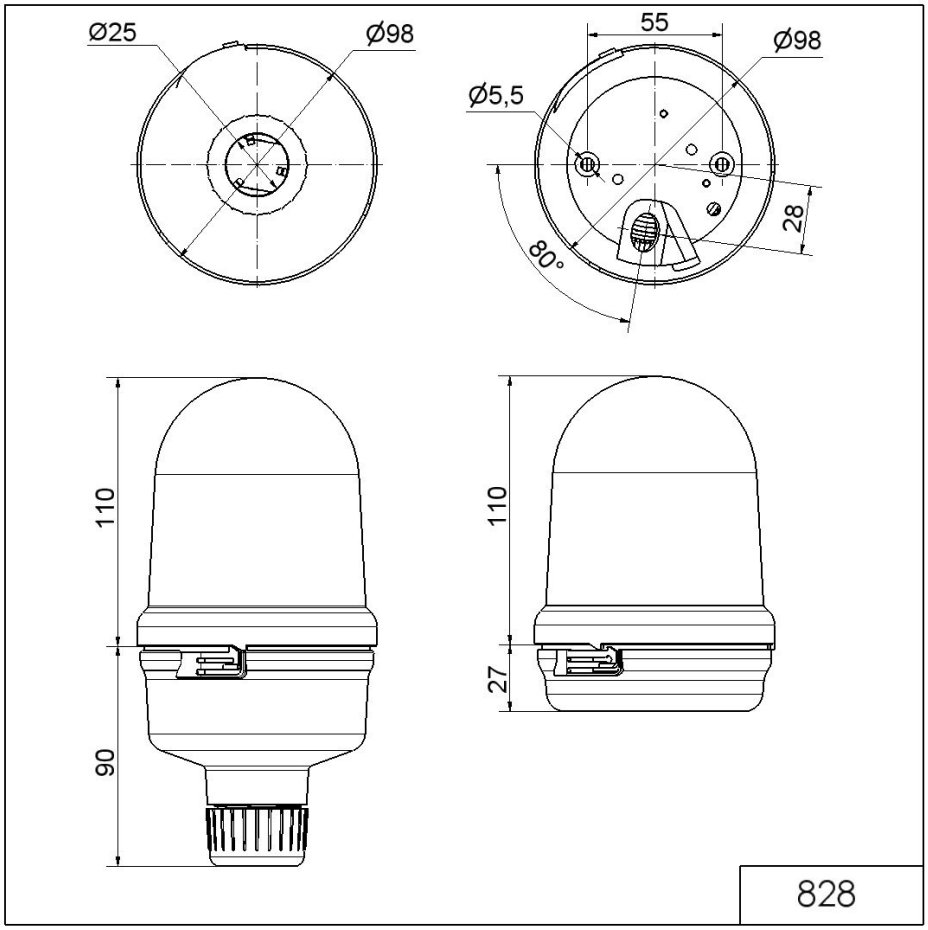


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.