KombiSIGN 50 / ASI-Device 845

AS-Interface Module BK



Part No.:	**845.800.68**
Series:	**KombiSIGN 50**

MECHANICAL DATA	
Height	67 mm
Diameter	60 mm
Materials	PC
Dome colour	Black
Protection category	IP54
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	74 g
Product weight	60 g


ELECTRICAL DATA	
Operating voltage	18,5 - 31,6V (ASI)
Rated operational current	50 mA
Protection class	Protection class 2
Pollution degree	3
AS-i Slave Type	Standard
AS-i Profile	S-8.F


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / ASI-Device 845

AS-Interface Module BK

DRAWING

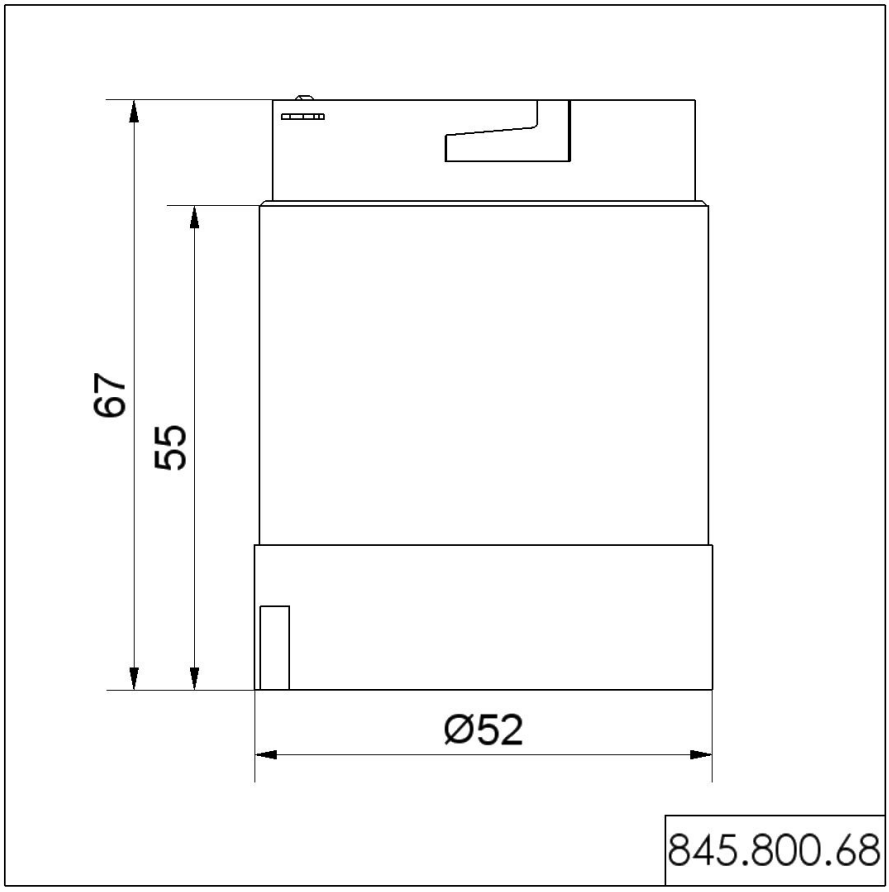

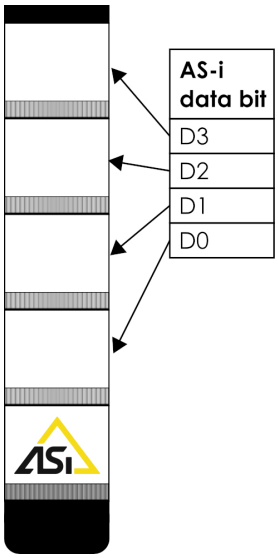

	Supply external (AUX)
Voltage	0-30 V DC 0-230 V AC External fuse M1,6A requiered
Output current	Σ 1,5 A
Supply (BUS/AUX)	AUX
Master profile	min. M1

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.