Baumer
Passion for Sensors

Inductive distance measuring sensors

IWRM 12Z8704/S14C

Inductive distance measuring sensors - linearized

Article number: 10144963

overview

- 0 … 4 mm
- voltage output / PNP
- external Teach-in
- connector M12
- -10 … 70 °C
- IP 67



Technical data

general data	
mounting type	quasi-flush
special type	2 adjust. switching points linearized
measuring distance Sd	0 … 4 mm
resolution	< 0,005 mm (stat.) < 0,005 mm (dynam.)
repeat accuracy	< 0,01 mm
adjustment	external Teach-in
linearity error	± 16 µm
temperature drift	± 5 % (Full Scale)
output indicator	LED red
Teach-Feedback	LED yellow
electrical data	
response time (factory characteristic)	< 2,5 ms
response time (teach in characteristic)	< 3,1 ms
voltage supply range +Vs	15 … 30 VDC

electrical data	
current consumption max. (no load)	20 mA
output circuit	voltage output / PNP
output signal	0 ... 10 VDC
load resistance	> 1000 Ohm
output current	< 10 mA (PNP)
voltage drop Vd	< 5 VDC (PNP)
short circuit protection	yes
reverse polarity protection	yes
mechanical data	
type	cylindrical threaded
housing material	brass nickel plated
dimension	12 mm
housing length	60 mm
connection types	connector M12
ambient conditions	
operating temperature	-10 … +70 °C
protection class	IP 67

remarks

- external Teach-in
- integrated analog- and switching output
- linear analog output


2019-12-02 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

IWRM 12Z8704/S14C


Inductive distance measuring sensors - linearized

Article number: 10144963


dimension drawing

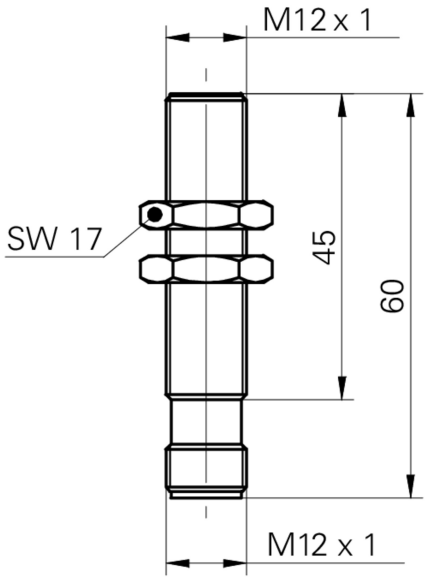

installation drawing

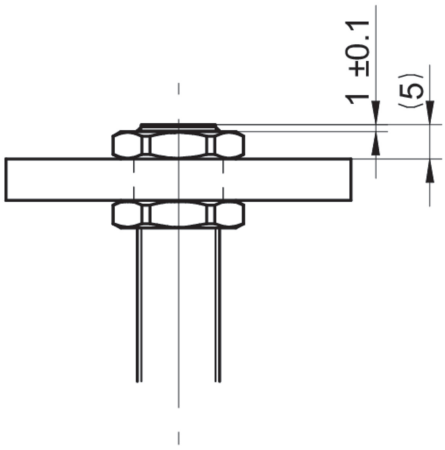

connection diagram

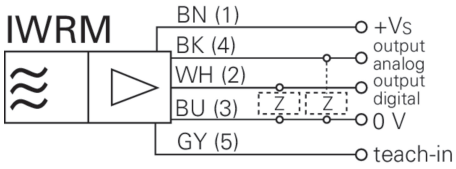

2019-12-02 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.