Incremental encoders

ITD 20 B14 Y 1

Solid shaft ø6 mm with synchro flange

50…1024 pulses per revolution

Overview

- Encoder with solid shaft ø6 mm
- Max. 1024 pulses per revolution
- Optical sensing method
- Centering alignment ø50 mm, mounting screw hole circle ø68 mm
- Industrial standard
- TTL or HTL output signals
- Flange connector radial



Technical data

Technical data - electrical ratings	
Voltage supply	5 VDC ±5 % 8...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤100 mA
Pulses per revolution	50 … 1024
Reference signal	Zero pulse, width 90°
Sensing method	Optical
Output frequency	≤120 kHz
Output signals	A, B, N + inverted
Output stages	TTL linedriver (short-circuit proof) HTL push-pull (short-circuit proof)
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Technical data - mechanical design	
Size (flange)	ø58 mm
Shaft type	ø6 mm solid shaft

Technical data - mechanical design	
Admitted shaft load	≤20 N axial ≤40 N radial
Flange	Synchro flange
Protection DIN EN 60529	IP 65
Operating speed	≤12000 rpm
Starting torque	≤0,01 Nm (+20 °C)
Material	Housing: aluminium, black, powder-coated Shaft: stainless steel
Operating temperature	-20...+70 °C -20...+100 °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 55-2000 Hz DIN EN 60068-2-27 Shock 100 g, 11 ms
Connection	Connector M23 type 2, 12-pin
Weight approx.	240 g

Optional

- Extended operating temperature range

2020-02-07 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

Incremental encoders


ITD 20 B14 Y 1

Solid shaft ø6 mm with synchro flange

50…1024 pulses per revolution

Terminal assignment

Connector	Assignment
Pin 5	Track A
Pin 6	Track A inv.
Pin 8	Track B
Pin 1	Track B inv.
Pin 3	Track N
Pin 4	Track N inv.
Pin 12	UB
Pin 10	GND
Pin 2	UB-Sense
Pin 11	GND-Sense
Pin 9	–
Pin 7	–



Trigger level


Outputs	**Linedriver**
Output level High	≥2.4 V
Output level Low	≤0.5 V
Load	≤70 mA

Outputs	**Push-pull** short-circuit proof
Output level High	≥UB -3 V
Output level Low	≤1.5 V
Load	≤70 mA


Output signals

Clockwise rotation when looking at the mounting side.

BI-Output signals

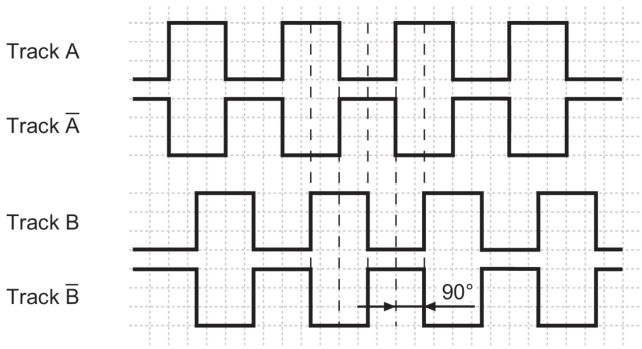

NI-Output signals

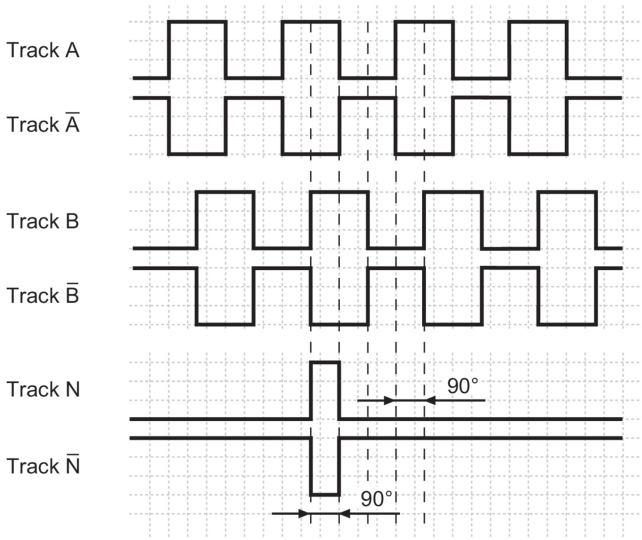


2020-02-07 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

ITD 20 B14 Y 1

Solid shaft ø6 mm with synchro flange

50…1024 pulses per revolution

Dimensions

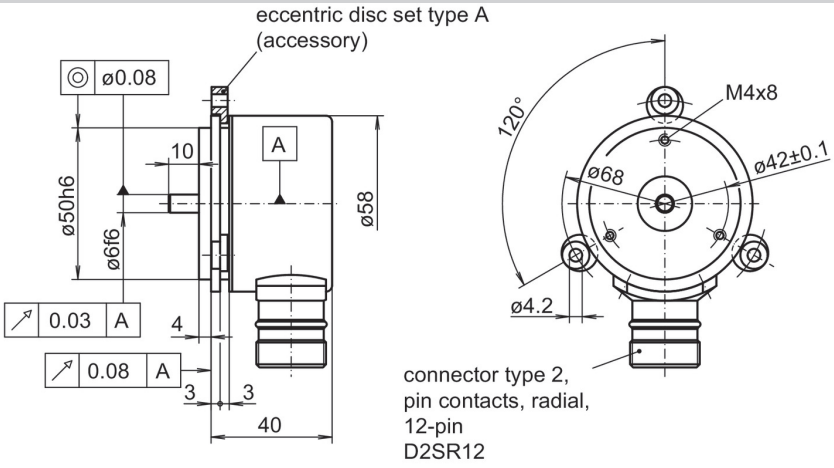

2020-02-07 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

ITD 20 B14 Y 1

Solid shaft ø6 mm with synchro flange
50…1024 pulses per revolution

Ordering reference

	ITD 20 B14 Y 1	#####	#	####	D2SR12	#	6	IP65
Product								
	ITD 20 B14 Y 1							
Pulse number								
50		50						
60		60						
64		64						
88		88						
90		90						
100		100						
120		120						
128		128						
200		200						
250		250						
254		254						
256		256						
360		360						
400		400						
500		500						
512		512						
600		600						
1000		1000						
1024		1024						
Voltage supply / signals								
5 VDC / TTL level, linedriver			T					
8...30 VDC / HTL level, push-pull			H					
8...30 VDC / TTL level, linedriver			R					
Output signals								
A, A inv, B, B inv				BI				
A, A inv, B, B inv, N, N inv				NI				
Connection								
Flange connector type 2, pin contacts, radial, 12-pin					D2SR12			
Operating temperature								
-20...+70 °C						S		
-20...+100 °C						E		
Flange / Solid shaft								
Synchro flange / ø6 mm							6	
Protection								
IP 65								IP65

Accessories

Mounting accessories

11065545	Set of eccentric fixings type A

Connectors and cables

11072792	Connector M23 - S2BG12, 1 m cable (incremental)

2020-02-07 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.