KombiSIGN 71 / LED Permanent Beacon 644

# LED Perm. light element 230VAC YE



| | |
|---|---|
| **Part No.:** | **644.300.68** |
| **Series:** | **KombiSIGN 71** |

| **MECHANICAL DATA** | |
|---|---|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Yellow |
| Protection category | IP65 |
| Service life optical | 50,000 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 74 g |
| Product weight | 59 g |

| **ELECTRICAL DATA** | |
|---|---|
| Operating voltage | 230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 35 mA |
| Rated inrush current | 2.000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| **OPTICAL DATA** | |
|---|---|
| Light source | LED |
| Light colour | Yellow |
| Optical signal image | Permanent |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Permanent Beacon 644

# LED Perm. light element 230VAC YE

## DRAWING

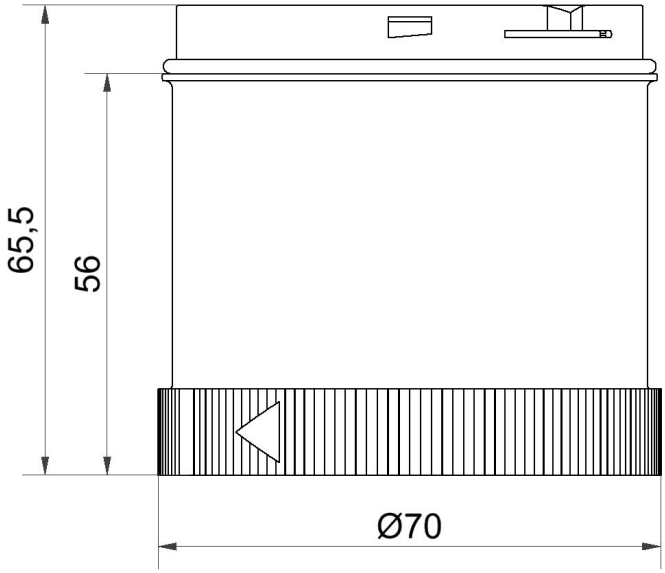


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.