Mini free-standing Beacons / Permanent Light 200

# Permanent Beacon EM 12-48VAC/DC BU

**Part No.:** **216.500.00**




| MECHANICAL DATA | |
|---|---|
| Height | 103 mm |
| Diameter | 57 mm |
| Materials | PA-GF<br>PC |
| Dome colour | Blue |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Flat plug |
| Type of fixing | Built-in mounting |
| Service life optical | depends on bulb |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 67 g |
| Product weight | 45 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 12-48V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 0% |
| Rated operational voltage | 24 VDC |
| Protection class | Protection class 2 |
| Pollution degree | 3<br>In the connection area: 2 |


| OPTICAL DATA | |
|---|---|
| Light colour | Blue |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini free-standing Beacons / Permanent Light 200

# Permanent Beacon EM 12-48VAC/DC BU

**DRAWING**

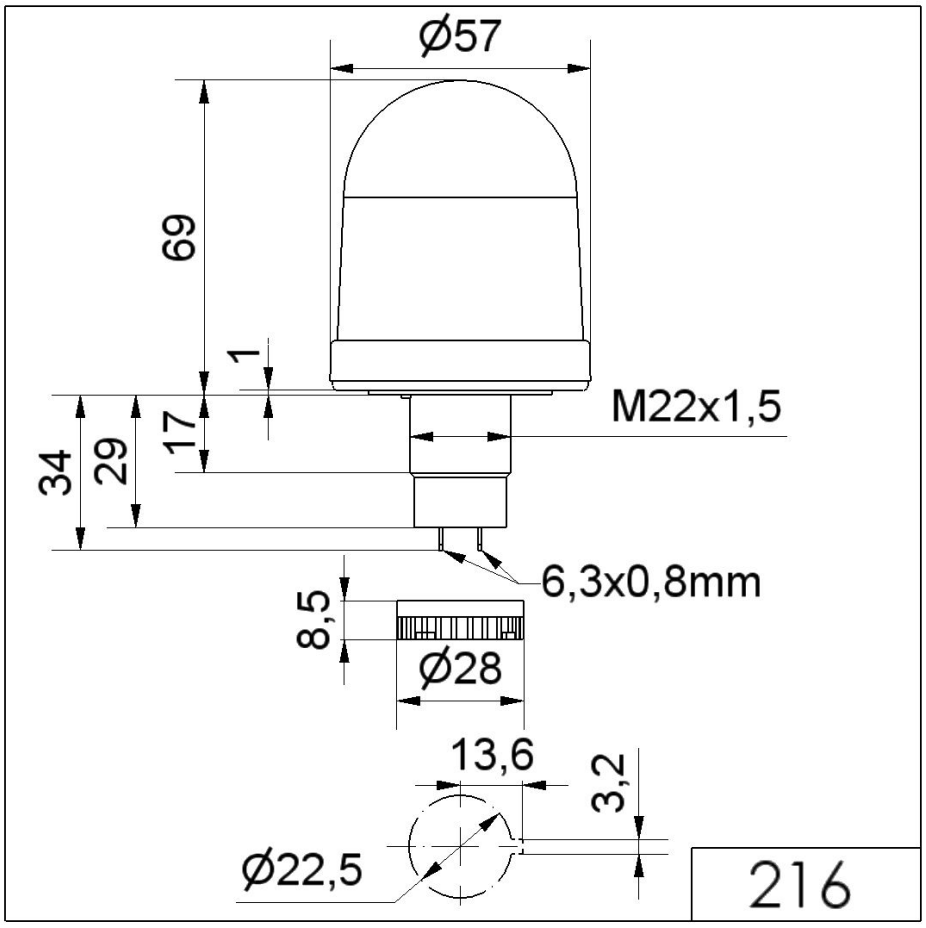


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.