Midi free-standing Beacons / Permanent Light 851

# Permanent Beacon WM 12-230VAC/DC GN




**Part No.: 851.200.08**

CE RoHS

| MECHANICAL DATA | |
|---|---|
| Height | 108 mm |
| Diameter | 57 mm |
| Materials | PC<br>PC/ABS |
| Dome colour | Green |
| Housing colour | Black |
| Protection category | IP54 |
| Connection | Screw terminals |
| cross-sectional area minimum | 0,50mm² / 20AWG |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Cable entry | Rubber pinch |
| Cable entry minimum | d = 5 mm |
| Cable entry maximum | d = 7 mm |
| Type of fixing | Wall mounting |
| Service life optical | depends on bulb |
| Working temperature minimum | -30°C |
| Working temperature maximum | +40°C |
| Weight with packaging | 90 g |
| Product weight | 90 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 12-230V |
| Operating voltage type | AC/DC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| OPTICAL DATA | |
|---|---|
| Light colour | Green |
| Lamp fitting/socket | B15d |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / Permanent Light 851

# Permanent Beacon WM 12-230VAC/DC GN

**DRAWING**

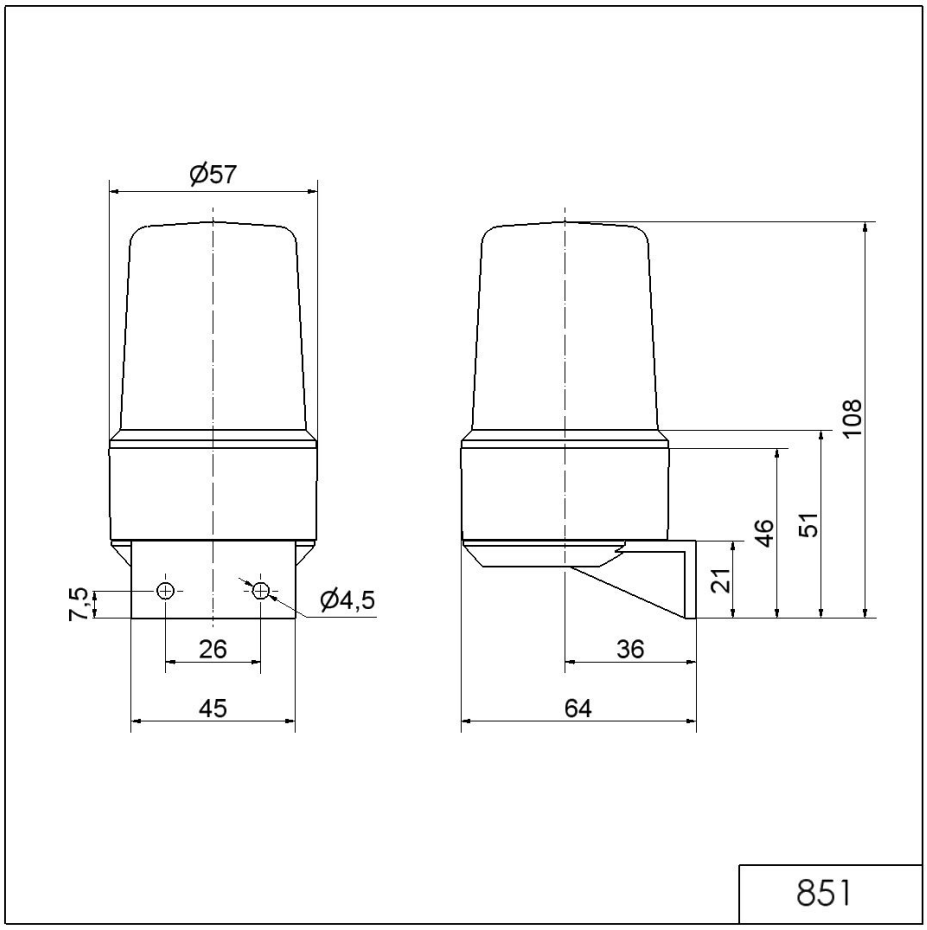


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.