KombiSIGN 50 / LED Bulb

# LED Bulb 24VAC/DC BU



| Part No.: | 956.500.75 |
|---|---|

| MECHANICAL DATA | |
|---|---|
| Height | 41 mm |
| Diameter | 29 mm |
| Materials | PA-GF<br>PC |
| Housing colour | Black |
| Service life optical | 50,000 h maximum |
| Weight with packaging | 13 g |
| Product weight | 9 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 45 mA |
| Rated inrush current | 500 mA |


| OPTICAL DATA | |
|---|---|
| Light source | LED |
| Light colour | Blue |
| Optical signal image | Permanent |
| Lamp fitting/socket | BA15d |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Bulb

# LED Bulb 24VAC/DC BU

**DRAWING**

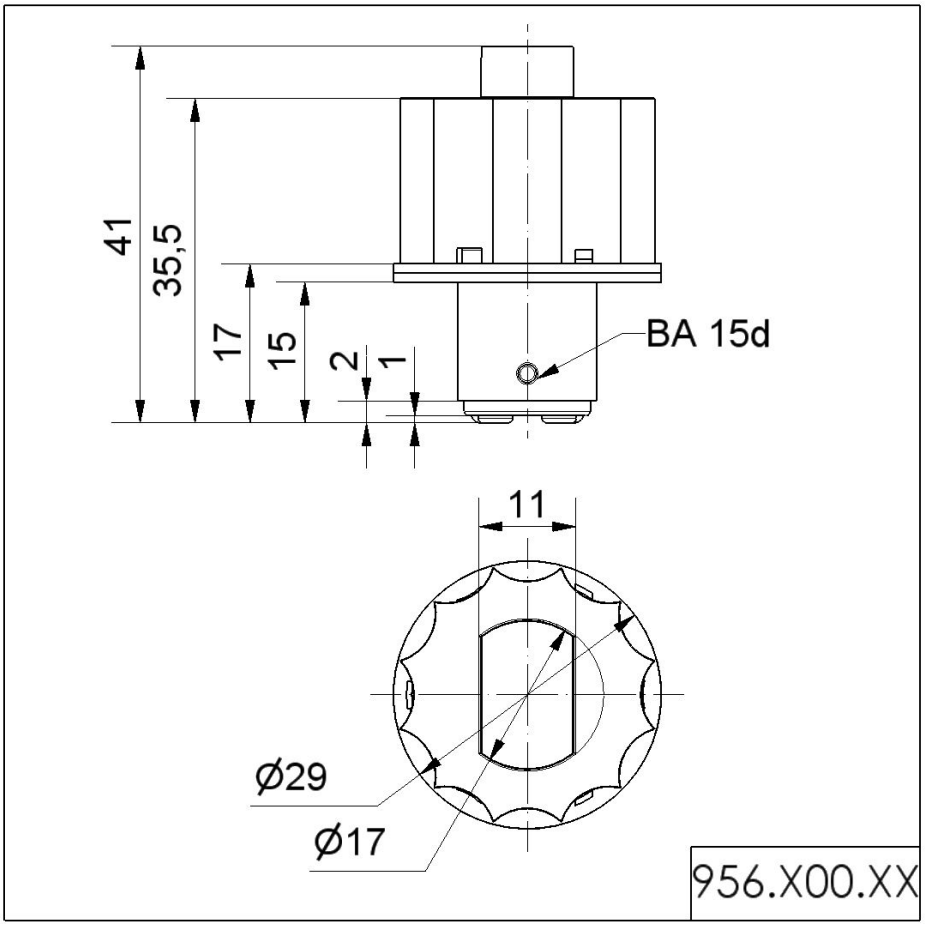


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.