
Ex horns and sirens / Ex-Electronic Buzzers Installation 718

Ex Electr. Buzzer EM Contin. tone 24VDC



Part No.: 718.000.55

MECHANICAL DATA	
Height	49 mm
Diameter	43 mm
Materials	PC/ABS
Housing colour	Grey
Protection category	IP30
Connection	Flat plug
Type of fixing	Built-in mounting
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Ex approval number	DMT 98 ATEX E005 X
Atex-guidance	2014/34/EU
Ex label for gas	II2G Ex ib IIC T4/T5/T6 Gb
Weight with packaging	59 g
Product weight	41 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	20 mA
Rated inrush current	50 mA
Protection class	Protection class 3
Pollution degree	2


ACUSTICAL DATA	
Volume/dB(max) at 1m distance	90,0 dB (A)
Acoustic signal image	Continuous tone
Audio frequency	2400 Hz

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Ex horns and sirens / Ex-Electronic Buzzers Installation 718

Ex Electr. Buzzer EM Contin. tone 24VDC

DRAWING

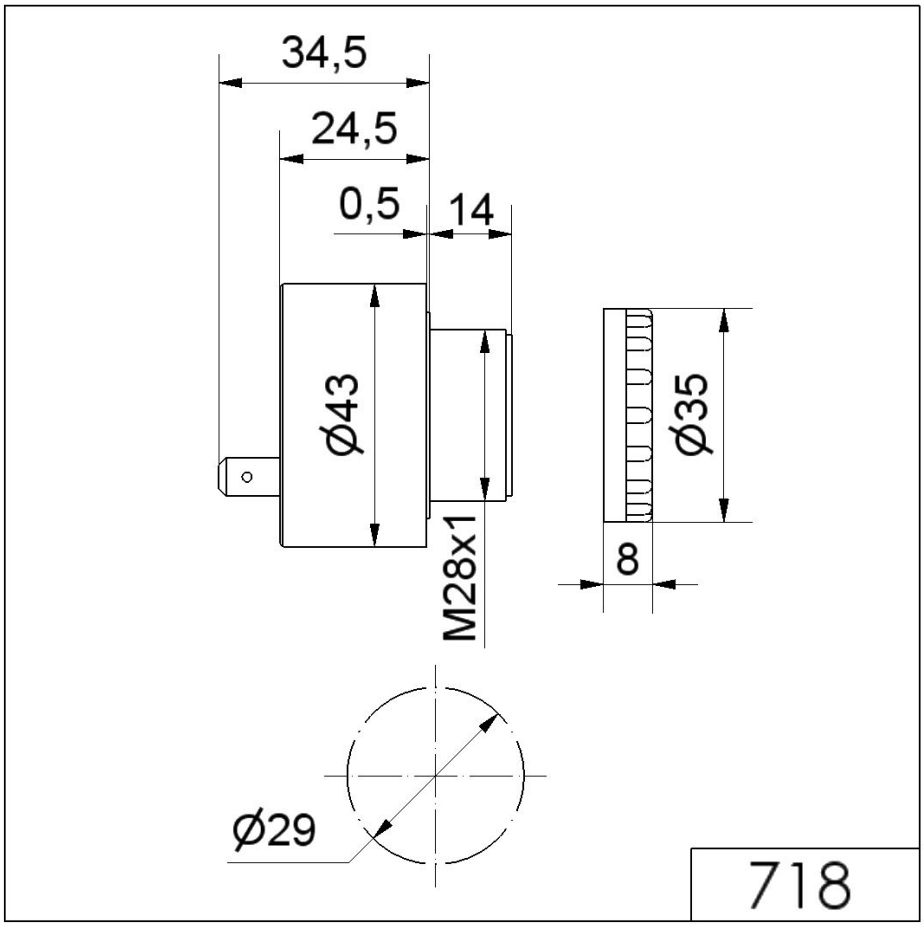

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.