KombiSIGN 71 / LED Blinking Beacon 644

# LED Blinking light element 24VAC/DC GN



| | |
|---|---|
| **Part No.:** | **644.210.75** |
| **Series:** | **KombiSIGN 71** |

| **MECHANICAL DATA** | |
|---|---|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Green |
| Protection category | IP65 |
| Service life optical | 50,000 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 73 g |
| Product weight | 59 g |

| **ELECTRICAL DATA** | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 25 mA |
| Rated inrush current | 150 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |


| **OPTICAL DATA** | |
|---|---|
| Light source | LED |
| Light colour | Green |
| Optical signal image | Blink |
| Blink frequency (Hz) | 1 Hz |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Blinking Beacon 644

# LED Blinking light element 24VAC/DC GN

## DRAWING

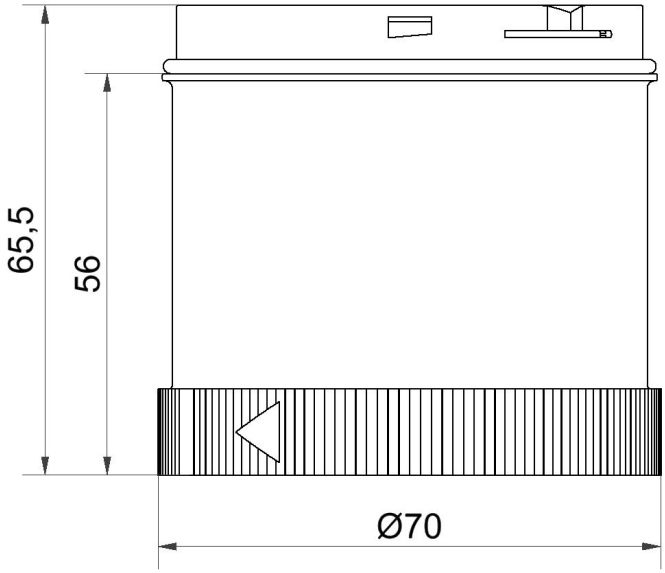


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.