Mini / Flash/Multi-Tone Sounder 423

# Flash/Sounder WM 8 tne 24VAC/DC YE



**Part No.: 423.320.75**

CE RoHS

| MECHANICAL DATA | |
|---|---|
| Height | 121 mm |
| Diameter | 83 mm |
| Materials | PC |
| Dome colour | Yellow |
| Housing colour | Grey |
| Protection category | IP65 |
| Connection | Screw terminals |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Cable entry | Membrane grommet |
| Cable entry minimum | d = 1 mm |
| Cable entry maximum | d = 9 mm |
| Tension relief | Pull-out protection |
| Type of fixing | Wall mounting |
| Service life optical | 4 million flashes minimum |
| Acoustic service life | 5,000 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 179 g |
| Product weight | 147 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 120 mA |
| Rated inrush current | 1.000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

| OPTICAL DATA | |
|---|---|
| Light source | Xenon |
| Light colour | Yellow |
| Optical signal image | Flash |
| Flash frequency | 1 Hz |
| Flash output | 1 J |

| ACUSTICAL DATA |
|---|


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / Flash/Multi-Tone Sounder 423

# Flash/Sounder WM 8 tne 24VAC/DC YE

| | |
|---|---|
| Volume/dB(max) at 1m distance | 109,0 dB (A) |
| Acoustic signal image | Multi-tone |
| Number of tones | 8 tone |

**DRAWING**

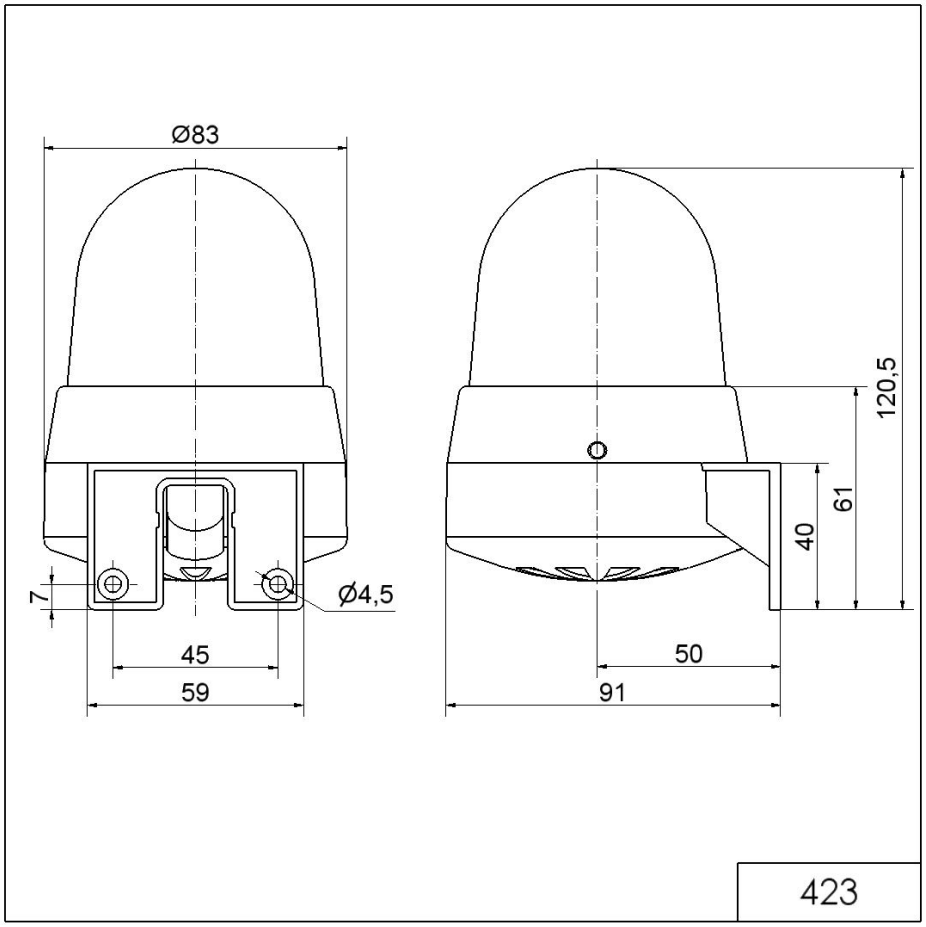


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.