Mini free-standing Beacons / EvoSIGNAL

Mini TriColour 24VAC/DC RD/YE/GN



Part No.:	**260.430.75**
Series:	**EvoSIGNAL Mini**

MECHANICAL DATA	
Height	85 mm
Diameter	62 mm
Materials	PC PC/ABS
Dome colour	Clear
Housing colour	Grey
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm² / 24AWG
cross-sectional area maximum	1,50mm² / 16AWG
Service life optical	50,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	92 g
Product weight	71 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	83 mA
Rated inrush current	1600 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	I


OPTICAL DATA	
Light source	LED
Light colour	MC 3 colours Red
Optical signal image	Permanent
Blink frequency (Hz)	1 Hz

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini free-standing Beacons / EvoSIGNAL

Mini TriColour 24VAC/DC RD/YE/GN

DRAWING

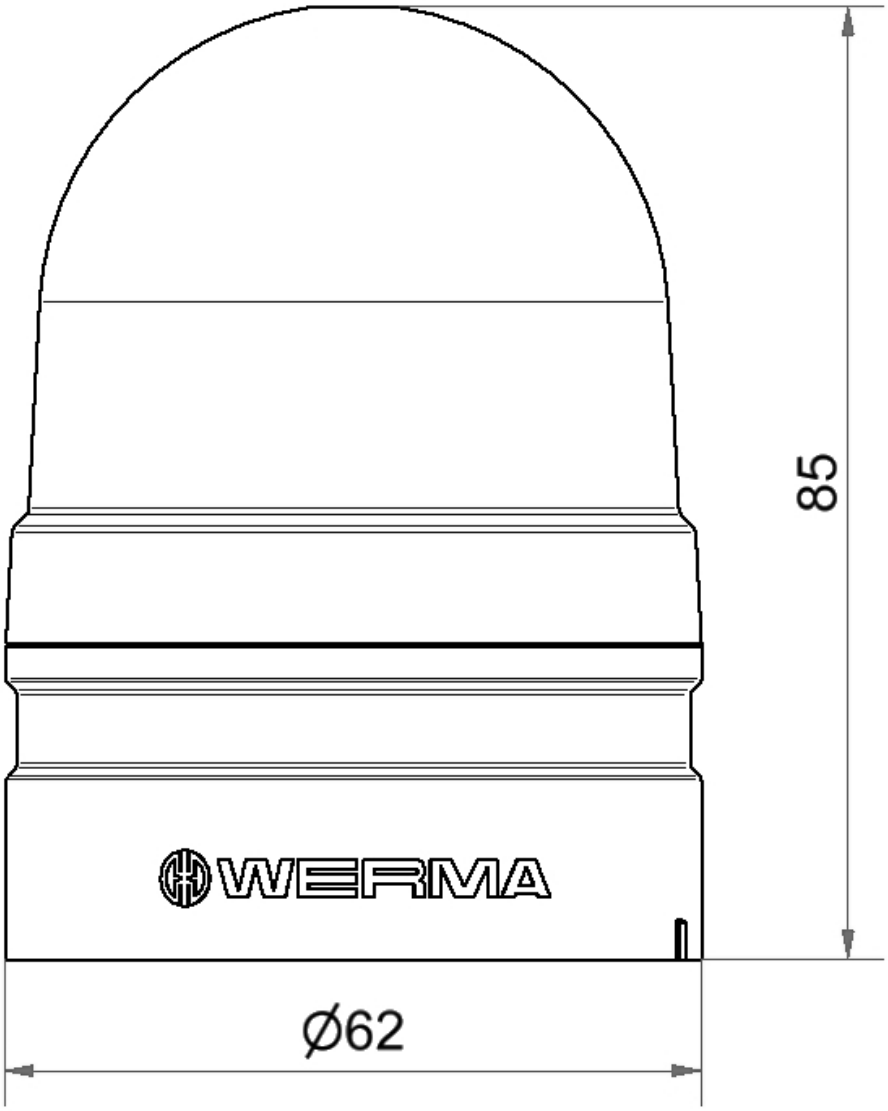

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.