Maxi free-standing Beacons / EvoSIGNAL

# Maxi TwinFLASH 115-230VAC CL




| | |
|---|---|
| **Part No.:** | **262.420.60** |
| **Series:** | **EvoSIGNAL Maxi** |

| **MECHANICAL DATA** | |
|---|---|
| Height | 173 mm |
| Diameter | 120 mm |
| Materials | PC<br>PC/ABS |
| Dome colour | Clear |
| Housing colour | Grey |
| Protection category | IP66 |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,25mm² / 24AWG |
| cross-sectional area maximum | 1,50mm² / 16AWG |
| Service life optical | 50,000 h minimum |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 505 g |
| Product weight | 348 g |

| **ELECTRICAL DATA** | |
|---|---|
| Operating voltage | 115-230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz at 230V<br>60Hz at 115V |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 165 mA |
| Rated inrush current | <6000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| **OPTICAL DATA** | |
|---|---|
| Light source | LED |
| Light colour | White |
| Optical signal image | EVS<br>Flash<br>TwinFlash |
| Flash frequency | 1 Hz |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Maxi free-standing Beacons / EvoSIGNAL

# Maxi TwinFLASH 115-230VAC CL

## DRAWING

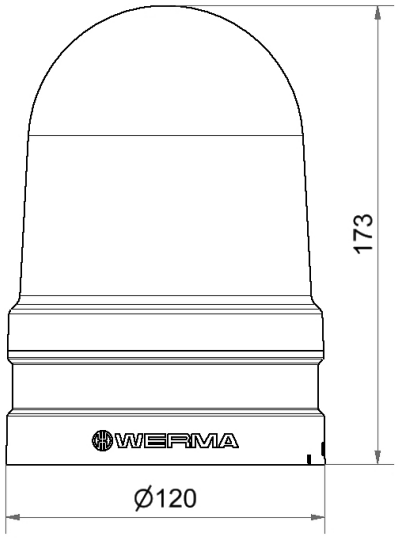


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.