Baumer
Passion for Sensors

Incremental encoders

ITD 40 A 4 Y99

Through hollow shaft ø20 to ø27 mm

200…2048 pulses per revolution

Overview

- Encoder with through hollow shaft ø20...27 mm
- Max. 2048 pulses per revolution
- Optical sensing method
- Mounting by torque support
- TTL or HTL output signals
- Cable output radial
- High protection



Technical data

Technical data - electrical ratings	
Voltage supply	5 VDC ±5 % 8...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤100 mA
Pulses per revolution	200 … 2048
Reference signal	Zero pulse, width 90°
Output frequency	≤120 kHz
Output signals	A, B, N + inverted
Output stages	TTL linedriver (short-circuit proof) HTL push-pull (short-circuit proof)
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Technical data - mechanical design	
Size (flange)	ø80 mm

Technical data - mechanical design	
Shaft type	ø20...27 mm (through hollow shaft)
Mounting kit	050
Protection DIN EN 60529	IP 65
Operating speed	≤3000 rpm
Starting torque	≤0,04 Nm (+20 °C)
Material	Housing: aluminium, bare Shaft: stainless steel
Operating temperature	-20...+70 °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 55-2000 Hz DIN EN 60068-2-27 Shock 100 g, 11 ms
Connection	Cable 1 m
Weight approx.	650 g

Optional

- Cable with connector

The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.
2020-02-17

ITD 40 A 4 Y99

Through hollow shaft ø20 to ø27 mm
200…2048 pulses per revolution


Terminal assignment

Core colour	Assignment
brown	Track A
green	Track A inv.
grey	Track B
pink	Track B inv.
red	Track N
black	Track N inv.
brown 0,5 mm²	UB
white 0,5 mm²	GND
blue	UB-Sense
white	GND-Sense
transparent	Shield/Housing

Output signals

Clockwise rotation when looking at the mounting side.

NI-Output signals

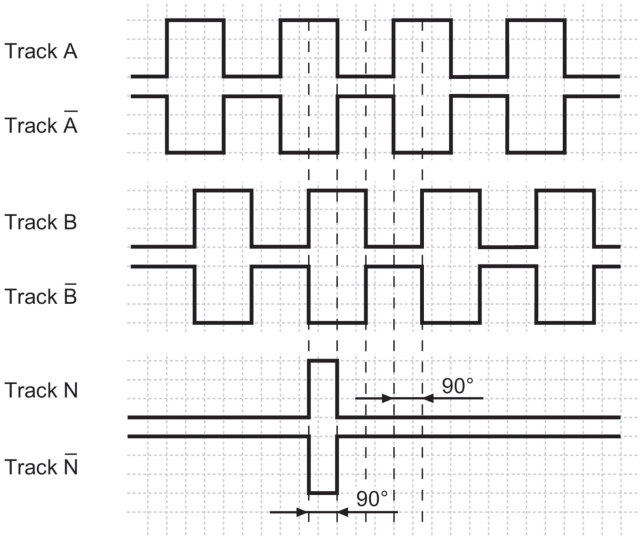

Trigger level

Outputs	**Linedriver**
Output level High	≥2.4 V
Output level Low	≤0.5 V
Load	≤70 mA

Outputs	**Push-pull** short-circuit proof
Output level High	≥UB -3 V
Output level Low	≤1.5 V
Load	≤70 mA


2020-02-17 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

ITD 40 A 4 Y99

Through hollow shaft ø20 to ø27 mm

200…2048 pulses per revolution

Dimensions

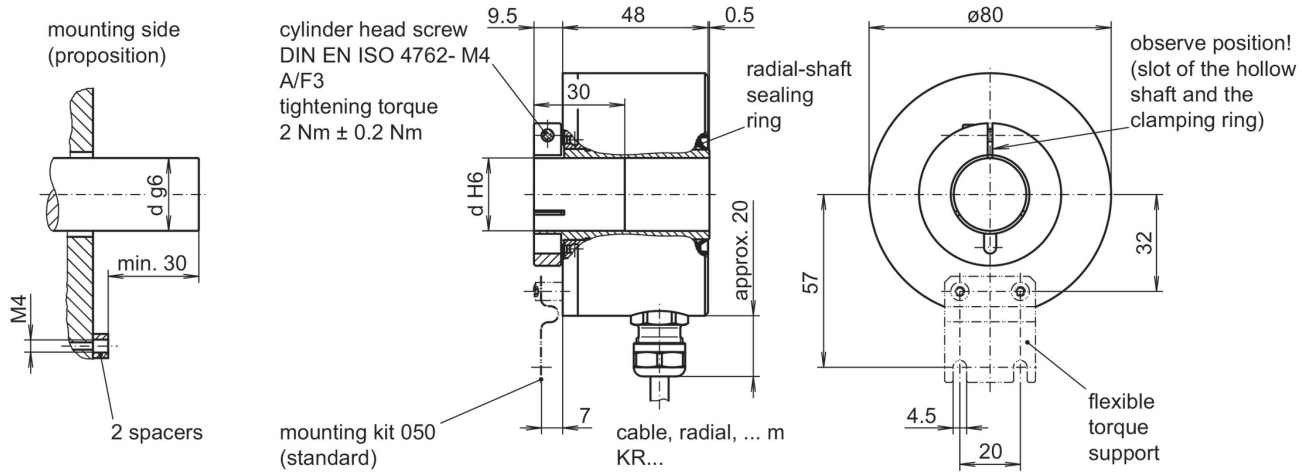

d = ø25 mm (standard), ø20 mm, ø22 mm, ø27 mm
Please specify the desired bore diameter in your order.

Please specify the desired
mounting kit in your order.

The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.
2020-02-17

Incremental encoders

ITD 40 A 4 Y99

Through hollow shaft ø20 to ø27 mm

200…2048 pulses per revolution

Ordering reference

	ITD 40 A 4 Y99	#####	#	NI	KR1	S	25	IP65	050
Product									
	ITD 40 A 4 Y99								
Pulse number									
200		200							
360		360							
500		500							
512		512							
720		720							
1000		1000							
1024		1024							
2048		2048							
Voltage supply / signals									
5 VDC / TTL level, linedriver			T						
8...30 VDC / HTL level, push-pull			H						
8...30 VDC / TTL level, linedriver			R						
Output signals									
A, A inv, B, B inv, N, N inv				NI					
Connection									
Cable 1 m, radial					KR1				
Operating temperature									
-20...+70 °C						S			
Through hollow shaft									
ø25 mm							25		
Protection									
IP 65								IP65	
Mounting kit									
Mounting kit 050									050

Other diameters on request.

2020-02-17 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.