Mini free-standing Beacons / Permanent Light 203

# Permanent Beacon WM 12-230VAC/DC GN



**Part No.: 203.200.00**

| MECHANICAL DATA | |
|---|---|
| Height | 91 mm |
| Diameter | 57 mm |
| Materials | PA-GF<br>PC |
| Dome colour | Green |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Spring-type terminal |
| cross-sectional area maximum | 2,50mm² / 14AWG |
| Cable entry | Screwed cable gland |
| Cable entry minimum | d = 3 mm |
| Cable entry maximum | d = 6 mm |
| Tension relief | Present (conforms to VDI) |
| Type of fixing | Wall mounting |
| Service life optical | depends on bulb |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 54 g |
| Product weight | 54 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 12-230V |
| Operating voltage type | AC/DC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |


| OPTICAL DATA | |
|---|---|
| Light colour | Green |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini free-standing Beacons / Permanent Light 203

# Permanent Beacon WM 12-230VAC/DC GN

**DRAWING**

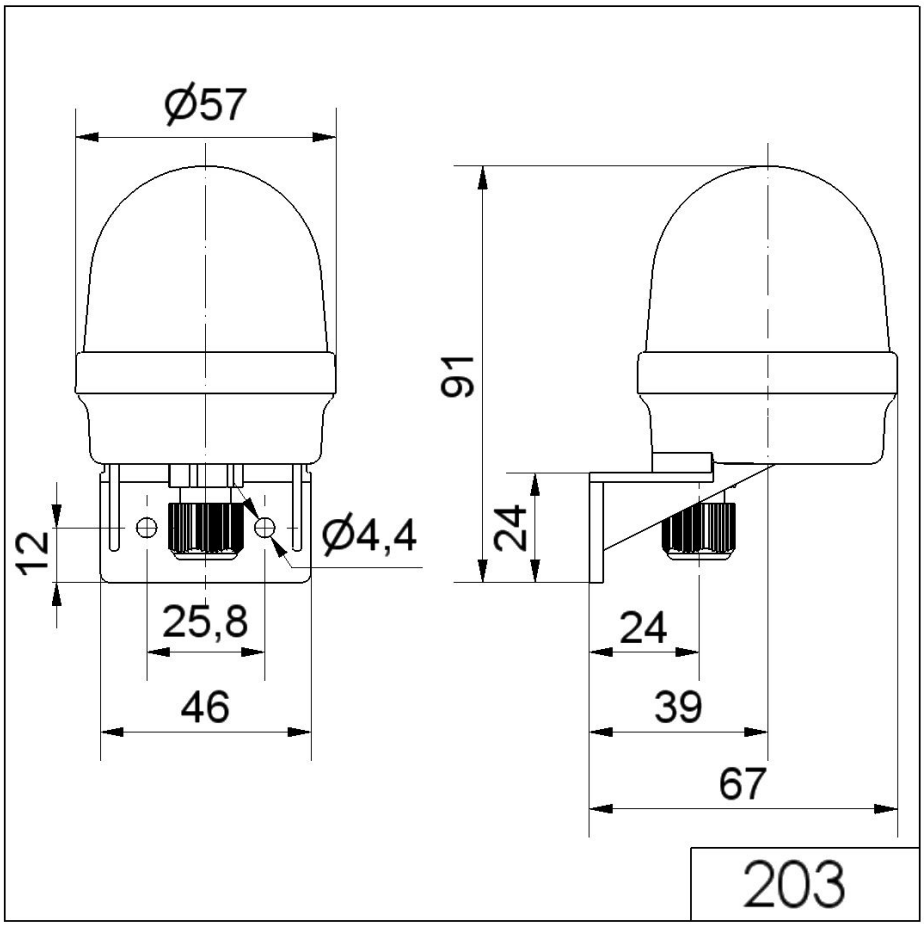


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.